## **Technical data sheet** Screw plug, PG thread

**Item number: 2090163** 





Screw plug N in accordance with DIN 46320, with PG thread to DIN 40430.

In conjunction with sealing ring, types 107, 170 or 171, protection rating IP68 (5 bar/1 hr).

Sealing ring not contained in the scope of delivery.

\* Prices according to DEL notation.

Cu7n

Brass

N

Nickel-plated


## Master data

Item number	2090163
Туре	168 MS PG16
Description 1	Screw plug
Manufacturer	OBO
Dimension	PG16
Material	Brass
Surface	Nickel-plated
Surface standard	
Smallest sales unit	100
Unit of quantity	Piece
Weight	1.3 kg
Weight unit	kg/100 pc.
CO2 Footprint (GWP) Cradle-to- Gate	0,0327 kg CO2e / 1 Piece

## **Technical data sheet** Screw plug, PG thread



**Item number: 2090163** 

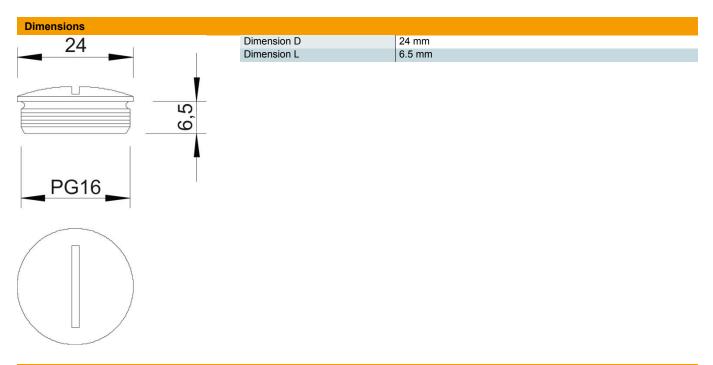

	data

explosion-proof	no
For Ex zone gas	Without
For Ex zone dust	Without
Thread	Pg 16
Thread type	PG
Nominal thread size metric/PG	16
Thread increase	1.41 mm
Fibre-glass reinforced	no
Halogen-free	yes
Impact-resistant	no
Protection rating	IP68