Technical data sheet Screw plug, PG thread

Item number: 2090090





Screw plug N in accordance with DIN 46320, with PG thread to DIN 40430.

In conjunction with sealing ring, types 107, 170 or 171, protection rating IP68 (5 bar/1 hr).

Sealing ring not contained in the scope of delivery.

* Prices according to DEL notation.

Brass





Nickel-plated


Master data

Item number	2090090
Туре	168 MS PG 9
Description 1	Screw plug
Manufacturer	OBO
Dimension	PG9
Material	Brass
Surface	Nickel-plated
Surface standard	
Smallest sales unit	100
Unit of quantity	Piece
Weight	0.53 kg
Weight unit	kg/100 pc.
CO2 Footprint (GWP) Cradle-to- Gate	0,0132 kg CO2e / 1 Piece

Technical data sheet Screw plug, PG thread



Item number: 2090090

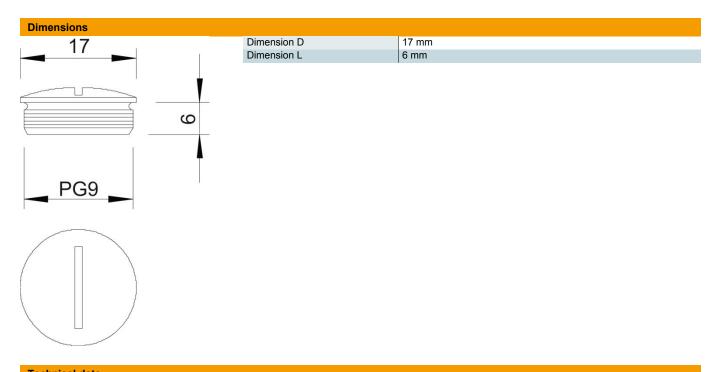

i echnicai data		
	explosion-proof	no
	For Ex zone gas	Without
	For Ex zone dust	Without
	Thread	Pg 9
	Thread type	PG
	Nominal thread size metric/PG	9
	Thread increase	1.41 mm
	Fibre-glass reinforced	no
	Halogen-free	yes
	Impact-resistant	no
	Protection rating	IP68