

Technical data sheet

Single push-fit clip

Item number: 2197804



These push-fit clips are used when installing cables and pipes on walls and ceilings and when running flexible pipes on concrete and in the screed. The single push-fit clips can be used instead of nail clips in concrete and aerated concrete. The advantage of the push-fit clips is that they only have to be pushed into the drilled hole. Anchors and bolts are not needed.



CEUK
CA

PA

Polyamide

Master data

Item number	2197804
Type	1974 16-23
Description 1	Plug-in clip
Description 2	single
Manufacturer	OBO
Dimension	16-23mm
Colour	Light grey; RAL 7035
Material	Polyamide
Smallest sales unit	100
Unit of quantity	Piece
Weight	0.263 kg
Weight unit	kg/100 pc.
CO2 Footprint (GWP) Cradle-to-Gate	0,0134 kg CO2e / 1 Piece


Technical data sheet

Single push-fit clip

Item number: 2197804



Dimensions

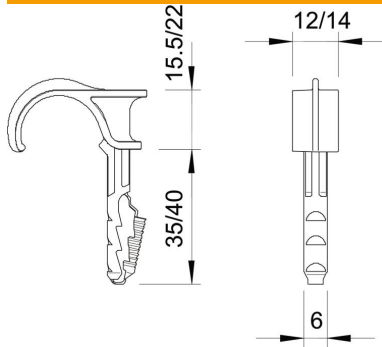

Technical data

Number of cables/pipes	1
Version for	Single-lobe
Fastening type	Plug fastening
Drill hole depth	40 mm
Drill hole diameter, min.	6 mm
Breaking load for concrete B25	50 N
Halogen-free	yes
Clamping range D, max.	23 mm
Clamping range D, min.	16 mm