

# Technical data sheet

## Clamp clip, double, A2 plastic pressure trough

Item number: 1161873



Suitable for all C profile rails with slot width 16–17 mm; stainless steel clip and bolt, polypropylene pressure trough, halogen-free, light grey RAL 7035.



|    |                 |
|----|-----------------|
| A2 | Stainless steel |
| 2B | Bright, treated |

### Master data

|                                   |                         |
|-----------------------------------|-------------------------|
| Item number                       | 1161873                 |
| Description 1                     | Clamp clip              |
| Description 2                     | double                  |
| Manufacturer                      | OBO                     |
| Dimension                         | 46-52mm                 |
| Material                          | Stainless steel         |
| Surface                           | Bright, treated         |
| Surface standard                  |                         |
| Smallest sales unit               | 25                      |
| Unit of quantity                  | Piece                   |
| Weight                            | 16.7 kg                 |
| Weight unit                       | kg/100 pc.              |
| CO Footprint (GWP) Cradle-to-Gate | 0,8153 kg COe / 1 Piece |


# Technical data sheet

## Clamp clip, double, A2 plastic pressure trough

Item number: 1161873



### Dimensions

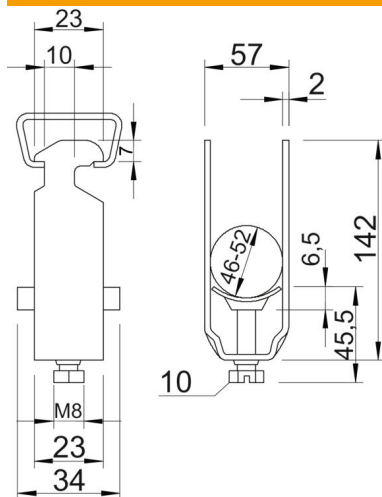

|                  |         |
|------------------|---------|
| Dimension A      | 23 mm   |
| Dimension B      | 57 mm   |
| Dimension C      | 40 mm   |
| Dimension G (mm) | M8      |
| Dimension H      | 129 mm  |
| Dimension L      | 45.5 mm |
| Dimension t      | 2 mm    |
| Dimension x      | 6.5 mm  |

### Technical data

|                                                |                 |
|------------------------------------------------|-----------------|
| Number of cables/pipes                         | 2               |
| for rail with slot width (with interval), max. | 17 mm           |
| for rail with slot width (with interval), min. | 16 mm           |
| Halogen-free                                   | yes             |
| Max. Tightening torque                         | 5 Nm            |
| With plastic trough                            | yes             |
| With metal trough                              | no              |
| Mounting type                                  | Profile rail    |
| Impact-resistant                               | no              |
| Clamping range D, max.                         | 52 mm           |
| Clamping range D, min.                         | 46 mm           |
| Surface addition                               | Untreated       |
| Material addition                              | Rustproof steel |
| With counter-trough                            | no              |
| Material of trough                             | Plastic         |
| Material quality of trough                     | Polypropylene   |