

Technical data sheet

Straight connector Rd 8–10 mm

Item number: 5328209



- With 4 hexagonal bolts M6 x 10
- Complies with the requirements of VDE 0185-305-3 (IEC/ EN 62305-3)




St	Steel
F	Hot galvanized

Master data

Item number	5328209
Type	237 N FT
Description 1	Connection sleeve
Manufacturer	OBO
Dimension	8-10mm
Material	Steel
Surface	Hot galvanized
Surface standard	DIN 267, Teil 10
Smallest sales unit	20
Unit of quantity	Piece
Weight	8.56 kg
Weight unit	kg/100 pc.
CO2 Footprint (GWP) Cradle-to-Gate	0,1896 kg CO2e / 1 Piece

Dimensions

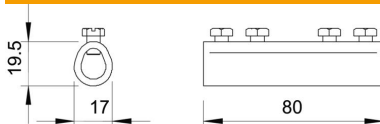

Technical data sheet

Straight connector Rd 8–10 mm

Item number: 5328209



Technical data

Type of fastening screw	Hexagonal bolt
Type of connector	Connectors
Lightning current carrying capacity	H/100 kA
Suitable for connection	Round conductor Rd 8–10 / Rd 8–10
Fit	Rd 8-10 mm
Round conductor diameter, conductor 1, max.	10 mm
Round conductor diameter, conductor 1, min.	8 mm
Round conductor diameter, conductor 2, max.	10 mm
Round conductor diameter, conductor 2, min.	8 mm
Intermediate plate	no