

# Technical data sheet

## Sprint screw, with Phillips screw


Item number: 3195023



Hardened steel, electrogalvanized and Hostaflon-coated. Pan head with combined Phillips and slotted head (Pozidriv size 2 except Ø 6 mm Pozidriv size 3).

The use of Sprint screws leads to considerably reduced screw-in times compared with standard screws. This noticeable advantage comes from the point with the first thread, which leads on to the double thread beyond.

Areas of use: wood, chipboard, Rigips panels, plastic anchors.

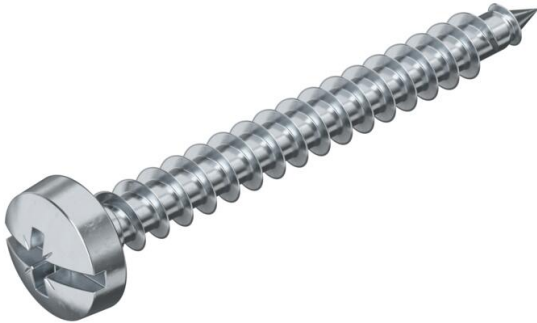

**St** Steel

**G** Electrogalvanized

### Master data

|                     |                            |
|---------------------|----------------------------|
| Item number         | 3195023                    |
| Type                | 4758 3.5x25                |
| Description 1       | Sprint screw               |
| Description 2       | panhead, +/- slot drive    |
| Manufacturer        | OBO                        |
| Dimension           | 3,5x25mm                   |
| Material            | Steel                      |
| Surface             | Electrogalvanized          |
| Surface standard    | EN ISO 19598 / EN ISO 4042 |
| Smallest sales unit | 200                        |
| Unit of quantity    | Piece                      |
| Weight              | 0.12 kg                    |
| Weight unit         | kg/100 pc.                 |


# Technical data sheet

## Sprint screw, with Philips screw

Item number: 3195023



### Dimensions

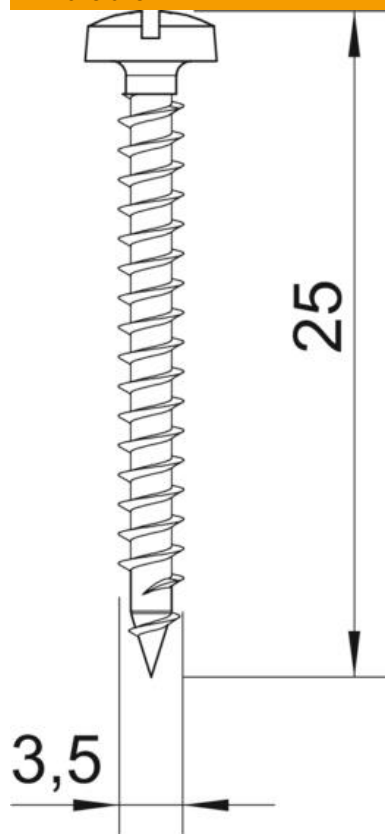

|             |        |
|-------------|--------|
| Length      | 25 mm  |
| Dimension D | 3.5 mm |
| Dimension L | 25 mm  |



### Technical data

|                 |                  |
|-----------------|------------------|
| Hardened        | yes              |
| Head diameter   | 6.5 mm           |
| Head shape      | Panhead          |
| Screw system    | Combination slot |
| Two-compartment | yes              |