

Technical data sheet

Universal anchor

Item number: 2347580



Also suitable as a cavity anchor, with collars to prevent slipping. 3 tabs take up the torque.
Required minimum bolt length = anchor length + component thickness + 1 x bolt Ø.
Withdrawal force applies to wood screws of the largest bolt diameter in concrete of class B25.
Our safety value recommendation: 5x




PE

Polyethylene

Master data

Item number	2347580
Type	910 FX 5x25
Description 1	Universal anchor
Available from	01.05.2020
Manufacturer	OBO
Dimension	5x25
Colour	Light grey
Material	Polyethylene
Smallest sales unit	100
Unit of quantity	Piece
Weight	0.037 kg
Weight unit	kg/100 pc.

Dimensions

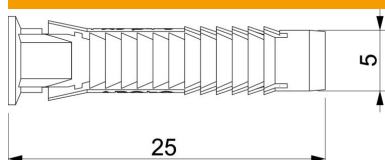

Length	30 mm
Dimension D	5 mm
Dimension L	25 mm

Technical data sheet

Universal anchor

Item number: 2347580



Technical data

Version for	Universal anchor
Pull-out value	200 N
Concrete Frat	200
Drill hole diameter, min.	5 mm
Suitable for fastening with cable ties	no
Suitable for gas concrete	no
Suitable for hexagonal wood screw	yes
Hollow brick Hlz12 Frat	150
Wood screws	2,5-4
Porous calcareous sandstone KSL12 Fempf.	230
Solid calcareous sandstone KSL12 Frat	210
With edge	yes
With bolts	no
Porous concrete P2 Fempf.	30
Porous concrete P4 Fempf.	50
Full brick Mz12 Frat	210