


Technical data sheet

MMS-plus F countersunk head tie

Item no. 3498160

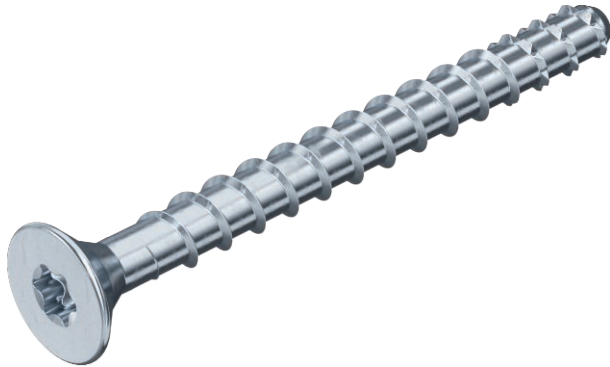

Bolt tie for direct mounting without additional anchors in cracked and uncracked concrete and masonry. With countersunk head for universal fastenings. Torx drive T40. Construction product tested according to EAD and CE mark, with European Technical Assessment (ETA) and proof of suitability. Load-bearing capacities under fire loads proven up to fire resistance class R120.




St Steel

Galvanised

Master data

Item no.	3498160
Type	MMS+ F 7.5x80
Description 1	Countersunk anchor
Dimension	7,5x80
Material description	Steel
Material	Steel
Material symbol	St
Interface description	Galvanised
Surface	Galvanised
Surface symbol	VZ
Smallest sales unit (VG)	50 Piece
Weight	2,00 kg/100 pc.

Technical data



Length	80,00 mm
Dimension L	80,00 mm
Dimension	7,5x80 mm
Anchor/nail/bolt version	Spiral anchor
Drill hole diameter	6,00 mm
Anchor length	80,00 mm
Head diameter	15,50 mm
Head shape	Countersunk head
Screw system	Torx
Screw system	Torx

