

Technical data sheet

MMS-plus I internal thread tie, with combination thread sleeve

Item no. 3498266



Bolt tie for direct mounting without additional anchors in cracked and uncracked concrete and masonry. With M8/M10 combination thread sleeve for fastening threaded rods. Construction product tested according to EAD and CE mark, with European Technical Assessment (ETA) and proof of suitability. Load-bearing capacities under fire loads proven up to fire resistance class R120.




St	Steel
G	Electrogalvanised

Master data

Item no.	3498266
Type	MMS+ I 7.5x40
Description 1	Internal thread anchor
Description 2	with connection sleeve
Dimension	7,5x40
Material description	Steel
Material	Steel
Material symbol	St
Interface description	Electrogalvanised
Surface	Electrogalvanised
Surface to DIN	EN ISO 19598 / EN ISO 4042
Surface symbol	G
Smallest sales unit (VG)	40 Piece
Weight	3,81 kg/100 pc.

Technical data

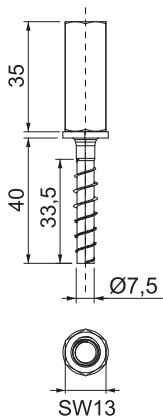

Length	40,00 mm
Dimension L	40,00 mm
WAF	13,00 mm
Dimension	7,5x40 mm
Drill hole diameter	6,00 mm
Anchor length	33,50 mm
Head shape	Hexagonal
Thread	M8/M10
Screw system	Hexagonal