

Technical data sheet

Device installation trunking Rapid 45-2, trunking width 160,
trunking height 53

Item number: 6116073



Trunking base and cover with base perforation for direct wall mounting.
Devices of 45 mm size can be clicked in directly.



PVC Polyvinylchloride

Master data

Item number	6116073
Type	GEK-K53160-3
Description 1	Device installation trunking
Description 2	Rapid 45
Manufacturer	OBO
Dimension	53x160x2000
Colour	Pure white; RAL 9010
Material	Polyvinylchloride
Smallest sales unit	8
Unit of quantity	Metre
Weight	210 kg
Weight unit	kg/100 m
CO2 Footprint (GWP) Cradle-to-Gate	4,1267 kg CO2e / 1 Meter


Technical data sheet

Device installation trunking Rapid 45-2, trunking width 160,
trunking height 53

Item number: 6116073



Dimensions

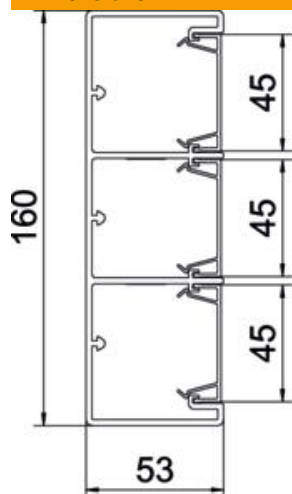

Length	2,000 mm
Width	160 mm
Height	53 mm

Technical data

Number of covers	3
Number of insertable partitions	3
Rear panel version (inner side)	Other continuous profile
Rectangular shape	yes
Base perforation	With base perforation
Halogen-free	no
Cable retaining clip	no
Duct connector	no
Cover mounting type	Internal
Mounting perforation in base	yes
Usable cross-section	6480 mm ²
Cover supplied	yes
Cover width	45 mm
Cover width 2	45 mm
Cover width 3	45 mm
Protection rating	IP30
Protective film	yes
Protection rating IK code	IK08
Symmetrical	yes
Permitted temperature range, max.	60 °C
Permitted temperature range, min.	-15 °C