

# Technical data sheet

## MS4121P mounting rail, slot 22 mm, perforated A2

Item number: 1122930



Heavy-duty C profile rail for individual installation of support constructions, e.g. for cable trays or as a panel for switchgear cabinets. Can also be used for cable routing, in conjunction with clamp clips with a U foot.



A2	Stainless steel
2B	Bright, treated

Master data		
Item number	1122930	
Type	MS4121P0500A2	
Description 1	Profile rail	
Description 2	perforated, slot 22mm	
Manufacturer	OBO	
Dimension	500x41x21	
Material	Stainless steel 1.4301	
Surface	Bright, treated	
Surface standard		
Smallest sales unit	1	
Unit of quantity	Piece	
Weight	84 kg	
Weight unit	kg/100 pc.	
CO2 Footprint (GWP) Cradle-to-Gate	3,6462 kg CO2e / 1 Piece	


# Technical data sheet

## MS4121P mounting rail, slot 22 mm, perforated A2

Item number: 1122930



### Dimensions

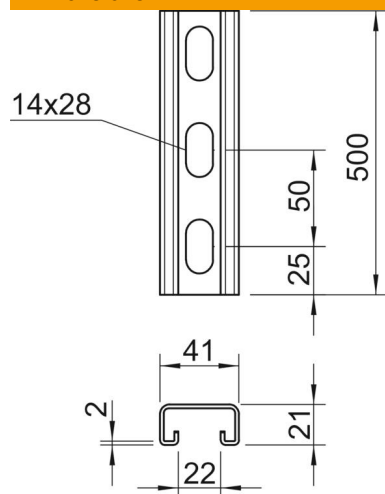

Length	500 mm
Width	41 mm
Height	21 mm
Dimension L	500 mm

### Technical data

Breakable	no
Type of perforation	Perforated back
Version for	Single profile
Drill hole spacing, centre	50 mm
Maintain electrical functions	no
Hole size	14x28 mm
Material thickness	2 mm
With perforation	yes
With toothing	yes
Profile shape	C profile
Slot width	22 mm
Static value A	1.65 cm <sup>2</sup>
Static value I <sub>y</sub>	0.95 cm <sup>4</sup>
Static value I <sub>z</sub>	4.51 cm <sup>4</sup>
Static value W <sub>y</sub>	0.89 cm <sup>3</sup>
Static value W <sub>z</sub>	2.2 cm <sup>3</sup>