

Technical data sheet

MS5030 mounting rail, slot 22 mm, A2, perforated

Item number: 1121499



Heavy-duty C profile rail for individual installation of support constructions, e.g. for cable trays or as a panel for switchgear cabinets. Can also be used for cable routing, in conjunction with clamp clips with a U foot.



- A2

Stainless steel
- 2B

Bright, treated

Master data		
Item number	1121499	
Type	MS5030P6000A2	
Description 1	Profile rail	
Description 2	perforated, slot 22mm	
Manufacturer	OBO	
Dimension	6000x50x30	
Material	Stainless steel 1.4301	
Surface	Bright, treated	
Surface standard		
Smallest sales unit	6	
Unit of quantity	Metre	
Weight	282.5 kg	
Weight unit	kg/100 m	
CO2 Footprint (GWP) Cradle-to-Gate	14,4447 kg CO2e / 1 Meter	


Technical data sheet

MS5030 mounting rail, slot 22 mm, A2, perforated

Item number: 1121499



Dimensions

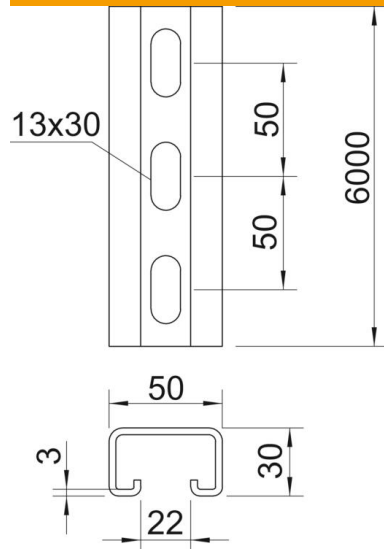

Length	6,000 mm
Width	50 mm
Height	30 mm
Dimension L	6,000 mm

Technical data

Breakable	no
Type of perforation	Perforated back
Version for	Single profile
Drill hole spacing, centre	50 mm
Maintain electrical functions	no
Material thickness	3 mm
With perforation	yes
With toothing	no
Profile shape	C profile
Slot width	18 mm
Static value A	3.39 cm ²
Static value I _y	3.99 cm ⁴
Static value I _z	13.11 cm ⁴
Static value W _y	3.95 cm ³
Static value W _z	6.38 cm ³