

Technical data sheet

Trunking unit with brush bar

Item number: 7403816

OBO
BETTERMANN



Ready-to-mount trunking unit for cable routing and device installation, consisting of a trunking base with two covers and a height-adjustable brush bar. The scope of delivery contains two lid butt seals and one connector. For height adjustment, six height adjustment units are required. Load capacity up to a maximum of 5 kN. The trunking unit can be supplemented with an adjustable covering contact profile for screed limitation in areas of door soffits and in front of radiator alcoves.



St Steel

FS Strip galvanized

Master data

| | |
|------------------------------------|---------------------------|
| Item number | 7403816 |
| Type | OKB U 25085 BLON |
| Description 1 | Flushfloor trunking unit |
| Description 2 | with brush bar |
| Manufacturer | OBO |
| Dimension | 2000x273x80 |
| Material | Steel |
| Surface | Strip galvanized |
| Surface standard | DIN EN 10346 |
| Smallest sales unit | 2 |
| Unit of quantity | Metre |
| Weight | 1425 kg |
| Weight unit | kg/100 m |
| CO2 Footprint (GWP) Cradle-to-Gate | 55,6285 kg CO2e / 1 Meter |


Technical data sheet

Trunking unit with brush bar

Item number: 7403816

OBO
BETTERMANN

Dimensions

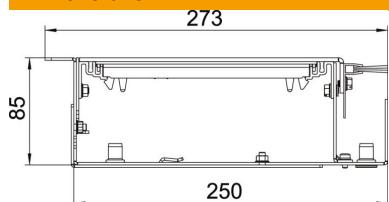

| | |
|-------------|----------|
| Length | 2,000 mm |
| Width | 250 mm |
| Height | 93 mm |
| Dimension h | 85 mm |

Technical data

| | |
|--|-----------------------|
| Mounting opening cover | no |
| Number of compartments | 2 St. |
| Floor plate | yes |
| Floor care | Dry |
| Cover fastening, locking | yes |
| Seal installation option | no |
| Installation opening for on-floor tank | no |
| Decouplable | yes |
| Suitable for expansion joint | no |
| Mesh wall | no |
| Minimum screed height | 93 |
| With connection opening | no |
| With equipotential bonding | no |
| With separating retainer | no |
| With overhang | yes |
| Mounting opening | Without |
| Nominal size for device installation units | 250 |
| Height-adjustment range, min. | 0 mm |
| Usable cross-section | 11500 mm ² |
| Removable cover | yes |
| Cross-section, draw a | 4231 mm ² |
| Cross-section, draw b | 7306 mm ² |
| Heavy-duty version | yes |
| Separating retainer fastening | stecken |
| Vertical load, large area | to 5,000 N |
| Vertical load, small area | to 3,000 N |
| Separating retainer fastening | Plug |