

# Technical data sheet

90° bend 110 FT

Item number: 6225174



90° bend, horizontal, with welded rung for all cable ladder types of 110 mm side height.  
Connectors should be ordered separately and in the appropriate quantity.



|    |                    |
|----|--------------------|
| St | Steel              |
| FT | Hot-dip galvanised |

## Master data

|                                    |                           |
|------------------------------------|---------------------------|
| Item number                        | 6225174                   |
| Type                               | SLB 90 1130R3 FT          |
| Description 1                      | 90° bend                  |
| Description 2                      | for cable ladder          |
| Manufacturer                       | OBO                       |
| Dimension                          | 110x300                   |
| Colour                             | zinc                      |
| Material                           | Steel                     |
| Surface                            | Hot-dip galvanised        |
| Surface standard                   | DIN EN ISO 1461           |
| Smallest sales unit                | 1                         |
| Unit of quantity                   | Piece                     |
| Weight                             | 593.2 kg                  |
| Weight unit                        | kg/100 pc.                |
| CO2 Footprint (GWP) Cradle-to-Gate | 13,4214 kg CO2e / 1 Piece |


# Technical data sheet

90° bend 110 FT

Item number: 6225174



## Dimensions

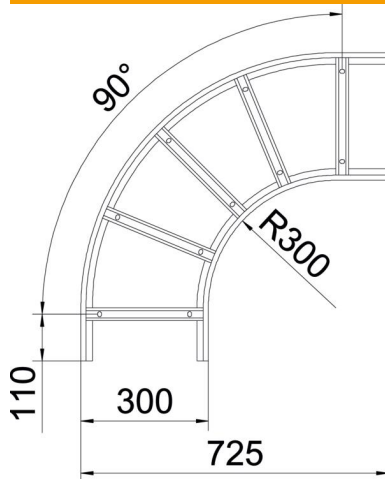

|             |        |
|-------------|--------|
| Width       | 300 mm |
| Height      | 110 mm |
| Dimension B | 300 mm |
| Dimension R | 300 mm |

## Technical data

|                               |                      |
|-------------------------------|----------------------|
| Bend (angle)                  | 90°                  |
| Version of the rungs          | Profile unperforated |
| Side rail version             | Flat profile         |
| Connector version             | Without connectors   |
| Maintain electrical functions | no                   |
| Change of direction           | Horizontal           |
| Rustproof steel, pickled      | no                   |
| Hinged                        | no                   |
| Side perforation              | no                   |
| Wide-span version             | no                   |
| Rail thickness                | 2 mm                 |