

# Technical data sheet

## Combined protection device 2in1 for CCTV camera systems

Item no. 5081070




Combination protection device for IP-based TV/camera systems

- Protection of power and data interface in a single device
- In aluminium housing
- Simple mounting with adapter plug
- Two-stage protection circuit
- Three-pole power connection for the power interface
- RJ45 connection for the data interface
- With LED operation display (OS)
- Incl. DIN rail fastening set

Application: Protection of CCTV, video signals, (IP) cameras and/or TV systems



### Dimensions

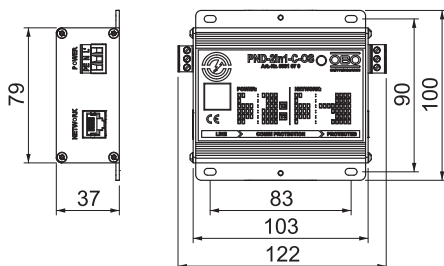


Length	122,50 mm
Width	100,00 mm
Height	37,10 mm

### Master data

Item no.	5081070
Type	PND-2in1-C-OS
Description 1	Combined prot. device 2in1
Description 2	for analogue CCTV applications
Dimension	230V
Smallest sales unit (VG)	1 Piece
Weight	27,00 kg/100 pc.

### Technical data

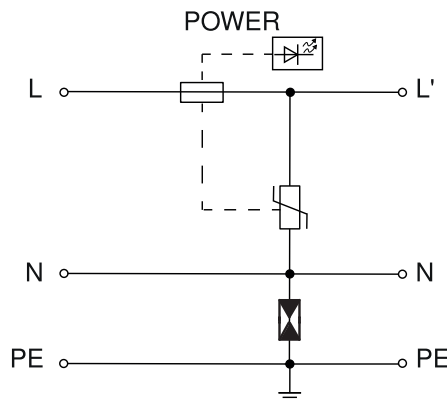

Temperature range	-20+80 °C
Installation type	Installation
Protection rating	IP20
Earthing via:	Connection cable / DIN rail
Lightning protection zone LPZ	1-3
SPD to IEC 61643-11	Class II+III
SPD to EN 61643-11	Type 2+3
Maximum continuous voltage (L-N)	255,00 V
Rated current	16,00 A
Protection level	<1,3 kV
Idle voltage	10,00 kV
Nominal discharge current (8/20 µs)	5,00 kA
Maximum discharge current (8/20 µs)	10,00 kA

### Network

Maximum continuous voltage AC	5,65 V
-------------------------------	--------

# Technical data sheet

## Combined protection device 2in1 for CCTV camera systems

Item no. 5081070



### Technical data

#### Network

Maximum continuous voltage DC	8,00 V
SPD to IEC 61643-21	Class I+II+III / D1+C2+C1
Category	Type 1+2+3 / D1+C2+C1
Impulse durability wire-wire	C1: 0,3 kV / 0,15 kA (8/20µs)
Impulse durability wire-earth	C2: 3 kV / 1,5 kA (8/20µs)
Impulse current (10/350)	0,50 kA
Protection level wire-wire	<40 V
Protection level wire-earth	<450 V
Frequency range	0 - 100 MHz
Frequency range	0,00 - 100,00 MHz
Cut-off frequency	100,00 MHz
Shielding connection available	Yes
Shield connection	Direct
Testing standard	IEC 61643-21