### **Technical data sheet**

### Junction box T 160, plug-in seal, flame-resistant







Junction box for the connection of cables and lines indoors and in protected outdoor areas. Rectangular design with plug-in seals to the sides and knock-out entries in the bottom. Suitable for wall and ceiling mounting and on mounting panels. With the option to fasten inside and to mount via the corner domes. Cover with quick lock, sealable. Flame-resistant type made from special polypropylene.

Junction box according to DIN EN 60670. Flame-resistant to DIN EN 60695-2-11, test temperature 960 °C. Impact resistance IK05 according to DIN EN 50102.
























Polypropylene, fibreglass reinforced

M	as	ter	d	ata

Item number	2007355	
Туре	T 160 F	
Description 1	Junction box	
Description 2	with entries	
Manufacturer	OBO	
Dimension	190x150x77	
Colour	Light grey; RAL 7035	
Material	Polypropylene, fibreglass reinforced	
Smallest sales unit	1	
Unit of quantity	Piece	
Weight	30 kg	
Weight unit	kg/100 pc.	
CO2 Footprint (GWP) Cradle-to- Gate	1,385 kg CO2e / 1 Piece	


## **Technical data sheet**

## Junction box T 160, plug-in seal, flame-resistant



**Item number: 2007355** 

Technical data

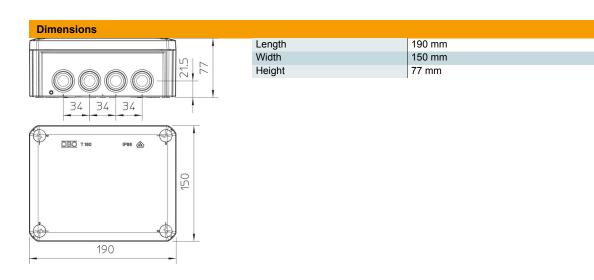

Expandable	yes		
No. of entries	12		
Type of entry	Plug-in seal		
Type of entry	Cable		
Type of housing penetration	Cuttable stepped membrane		
Measured insulation voltage Vi	500 V		
Equipment	Without		
Cover	Not transparent		
Cover fastening	Screwed		
Entry from rear	yes		
Entries	7 x M25		
	5 x M32		
Explosion-tested version	no		
Flame-resistant	Acc. to VDE 0471/DIN 695 Part 2-1, test temperature 960 °C		
Shape	Rectangular		
Maintain electrical functions	Without		
For Ex zone	Without		
For Ex zone gas	Without		
For Ex zone dust	Without		
Fibre-glass reinforced	yes		
Clear internal dimensions	176x135x67 mm		
With screening	no		
with lid	yes		
Mounting type	Wall/ceiling mounting		
Nominal cross-section, min.	16 mm²		
Nominal voltage	500 V		
Sealable	yes		
Protection rating	IP66		
Protection rating IK code	IK05.		
Permitted temperature range, max.	60 °C		
Permitted temperature range, min.	-5 °C		

# **Technical data sheet**

Junction box T 160, plug-in seal, flame-resistant



**Item number: 2007355** 

Technical data		
	Transparent lid	no
	Weatherproof	no