

Technical data sheet

UTC3 W with 2+1 protective contact sockets, white and orange

Item number: 7404609



The ready-for-connection UTC3 universal support possesses 2 pre-installed 33° protective contact sockets in white of 16 A and one pre-installed 33° protective contact socket in orange of 16 A. Suitable for VL connection cables and device installation units of nominal size 2, 4, R4, 6 and R7.



PVC connection cable with connector, 3-pin, type WINSTA® MIDI.

The ready-for-connection UTC3 universal support has 2 pre-installed 33° protective contact sockets in white of 16 A and one pre-installed 33° protective contact socket in orange of 16 A.

PVC connection cable with connector, 3-pin, type WINSTA® MIDI

PA Polyamide

Master data

Item number	7404609
Type	UTC3 W W2OR1
Description 1	Universal supportConnectWINSTA
Description 2	double white,single orange
Manufacturer	OBO
Dimension	165x76x45
Material	Polyamide
Smallest sales unit	1
Unit of quantity	Piece
Weight	39.8 kg
Weight unit	kg/100 pc.
CO2 Footprint (GWP) Cradle-to-Gate	1,0708 kg CO2e / 1 Piece

Technical data sheet

UTC3 W with 2+1 protective contact sockets, white and orange


Item number: 7404609



Dimensions



Length	175 mm
Width	76 mm
Height	60 mm

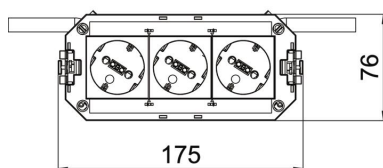

Technical data

Connection cable, halogen-free	no
Number of installable devices	3
Version for	Double pure white/single pure orange
Cable length	300 mm
Line cross-section	2.5 mm ²
Plug-in system	WINSTA® MIDI
Plug connector system, system-specific	yes
Circuit	2
System length	165 mm
Surge protection	no