

Technical data sheet

UTC4 W with 3+1 protective contact sockets, 1 socket with surge protection

Item number: 7404622



The ready-for-connection UTC4 universal support possesses 3 pre-installed 33° protective contact sockets in white and 1 pre-installed 33° protective contact socket in orange (with surge protection module, type 3, according to DIN EN 61643-11), 250 V~, 16 A. Suitable for VL connection cables and device installation units of nominal size R7, R9 and 9.

PVC connection cable with connector, 3-pin, type WINSTA® MIDI. The ready-for-connection UTC4 universal support has 3 pre-installed 33° protective contact sockets in white and one pre-installed 33° protective contact socket in orange (with surge protection module type 3, according to DIN EN 61643-11), 250 V~ 16 A.

PVC connection cable with connector, 3-pin, type WINSTA® MIDI

PA Polyamide

Master data

Item number	7404622
Type	UTC4 W W3OR1 Ü
Description 1	Universal supportConnectWINSTA
Description 2	triple white,single orange,SPD
Manufacturer	OBO
Dimension	208x76x45
Material	Polyamide
Smallest sales unit	1
Unit of quantity	Piece
Weight	48.2 kg
Weight unit	kg/100 pc.
CO2 Footprint (GWP) Cradle-to-Gate	1,2296 kg CO2e / 1 Piece

Technical data sheet

UTC4 W with 3+1 protective contact sockets, 1 socket with surge protection


Item number: 7404622



Dimensions



Length	218 mm
Width	76 mm
Height	60 mm

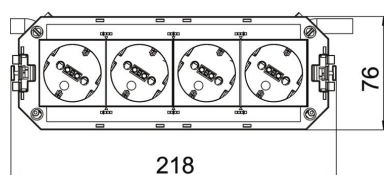

Technical data

Connection cable, halogen-free	no
Number of installable devices	4
Version for	Triple pure white/single pure orange
Cable length	300 mm
Line cross-section	2.5 mm ²
Plug-in system	WINSTA® MIDI
Plug connector system, system-specific	yes
Circuit	1
System length	208 mm
Surge protection	yes