

Technical data sheet

UVS energy distributor with fixed connection, normal and special circuit
Item number: 6108010



St Steel

Energy distributor for heavy current technology with fixed connection, equipped and pre-wired.

Input: Two 3-phase circuits via a screwless terminal block, 5-pin, for cable cross-sections of 0.5–4 mm².

Output: Twelve self-locking connectors, 3-pin, in white (6x) and black (6x), 16 A, type GST18i (socket part: 2 x L1, 2 x L2, 2 x L3 for each rotary current circuit).
Internal wiring: PVC non-sheathed cable H07V-U2.5.

Master data		
Item number	6108010	
Type	UVS-6S6W2	
Description 1	Underfloor distributor	
Manufacturer	OBO	
Material	Steel	
Smallest sales unit	1	
Unit of quantity	Piece	
Weight	146.1 kg	
Weight unit	kg/100 pc.	
CO2 Footprint (GWP) Cradle-to-Gate	4,134 kg CO2e / 1 Piece	


Technical data sheet

UVS energy distributor with fixed connection, normal and special circuit

Item number: 6108010



Dimensions

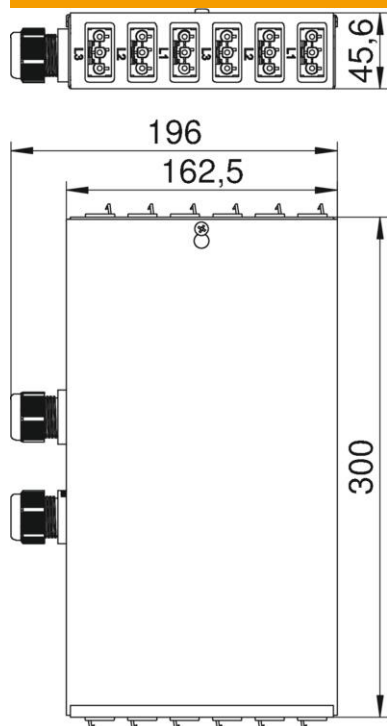

Technical data

Connection type	Terminal block
No. of outlets	12
Number of input circuits	2
Input	5-pole
Colour of the plug connector system	Black/white
Suitable for through wiring	no
Cross-section of the connection cable	4 mm ²
Plug connector system, system-specific	yes