

Technical data sheet

Clamp clip, single, A2 plastic pressure trough

Item number: 1178504



Suitable for all C profile rails with slot width 18 mm and 22 mm.

Polypropylene pressure trough, halogen-free, colour light grey RAL 7035.



A2 Stainless steel

2B Bright, treated

Master data

| | |
|------------------------------------|-------------------------|
| Item number | 1178504 |
| Type | 2056U 12 A2 |
| Description 1 | Clamp clip |
| Manufacturer | OBO |
| Dimension | 8-12mm |
| Material | Stainless steel 1.4301 |
| Surface | Bright, treated |
| Surface standard | |
| Smallest sales unit | 50 |
| Unit of quantity | Piece |
| Weight | 3 kg |
| Weight unit | kg/100 pc. |
| CO2 Footprint (GWP) Cradle-to-Gate | 0,1706 kg COe / 1 Piece |


Technical data sheet

Clamp clip, single, A2 plastic pressure trough

Item number: 1178504



Dimensions

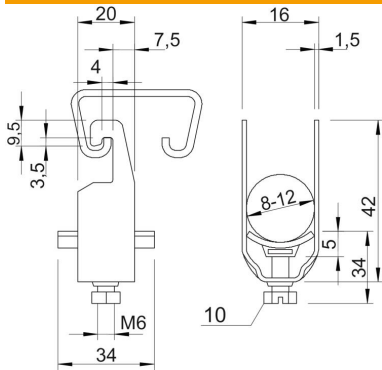

| | |
|------------------|--------|
| Dimension A | 20 mm |
| Dimension B | 16 mm |
| Dimension C | 34 mm |
| Dimension G (mm) | M6 |
| Dimension H | 42 mm |
| Dimension L | 34 mm |
| Dimension t | 1.5 mm |
| Dimension x | 5 mm |

Technical data

| | |
|--|-----------------|
| Number of cables/pipes | 1 |
| for 1 cable H | 42 mm |
| for 1 cable L | 34 |
| for rail with slot width (with interval), max. | 22 mm |
| for rail with slot width (with interval), min. | 18 mm |
| Halogen-free | yes |
| Max. Tightening torque | 3 Nm |
| With plastic trough | yes |
| With metal trough | no |
| Mounting type | Profile rail |
| Impact-resistant | no |
| Clamping range D, max. | 12 mm |
| Clamping range D, min. | 8 mm |
| Surface addition | Untreated |
| Material addition | Rustproof steel |
| With counter-trough | no |
| Material of trough | Plastic |
| Material quality of trough | Polypropylene |