

# Technical data sheet

## Clamp clip, single, ALU plastic pressure trough

Item number: 1184024



Also suitable for angular steel of 40 mm shaft length; aluminium ALMg3 clip and bolt, polypropylene pressure trough, halogen-free, colour light grey RAL 7035. The clamp clips 2056/W ALU for one cable according to VDE 0298-1 is suitable for individual routing of single-wire cables in rotary current networks, as there is no closed galvanic circuit. However, the lower mechanical resistance of the aluminium clips must be taken into account for short circuits, i.e. keep the distance between the clips as short as possible in a longitudinal direction and ensure sufficient side spacing between the cables.



**Alu** Aluminium

### Master data

Item number	1184024
Type	2056W 22 ALU
Description 1	Clamp clip
Manufacturer	OBO
Dimension	16-22mm
Material	Aluminium
Smallest sales unit	50
Unit of quantity	Piece
Weight	1.9 kg
Weight unit	kg/100 pc.
CO2 Footprint (GWP) Cradle-to-Gate	0,2995 kg COe / 1 Piece


# Technical data sheet

## Clamp clip, single, ALU plastic pressure trough

Item number: 1184024



### Dimensions

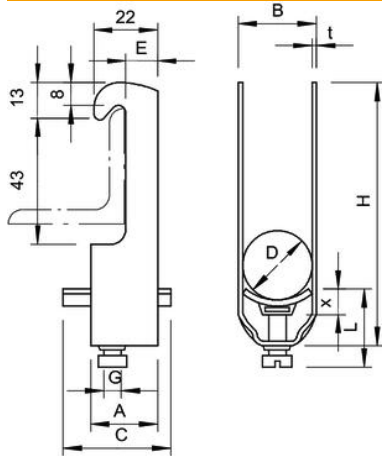

Dimension A	23 mm
Dimension B	27 mm
Dimension C	34 mm
Dimension E	11 mm
Dimension G (mm)	M6
Dimension H	85 mm
Dimension L	27 mm
Dimension t	1.5 mm
Dimension x	5 mm

### Technical data

Number of cables/pipes	1
for 1 cable H	85 mm
for 1 cable L	27
For pipe diameter, max.	20 mm
For pipe diameter, min.	20 mm
Halogen-free	yes
Max. Tightening torque	2 Nm
With plastic trough	yes
With metal trough	no
Mounting type	Angle profile
Impact-resistant	no
Clamping range D, max.	22 mm
Clamping range D, min.	16 mm
Surface addition	Untreated
Material addition	Aluminium
With counter-trough	no
Material of trough	Plastic
Material quality of trough	Polypropylene