

# Technical data sheet

## Clamp clip, single, ALU plastic pressure trough

Item number: 1184040



Also suitable for angular steel of 40 mm shaft length; aluminium ALMg3 clip and bolt, polypropylene pressure trough, halogen-free, colour light grey RAL 7035. The clamp clips 2056/W ALU for one cable according to VDE 0298-1 is suitable for individual routing of single-wire cables in rotary current networks, as there is no closed galvanic circuit. However, the lower mechanical resistance of the aluminium clips must be taken into account for short circuits, i.e. keep the distance between the clips as short as possible in a longitudinal direction and ensure sufficient side spacing between the cables.



Alu Aluminium

### Master data

|                                    |                         |
|------------------------------------|-------------------------|
| Item number                        | 1184040                 |
| Type                               | 2056W 34 ALU            |
| Description 1                      | Clamp clip              |
| Manufacturer                       | OBO                     |
| Dimension                          | 28-34mm                 |
| Material                           | Aluminium               |
| Smallest sales unit                | 50                      |
| Unit of quantity                   | Piece                   |
| Weight                             | 3.2 kg                  |
| Weight unit                        | kg/100 pc.              |
| CO2 Footprint (GWP) Cradle-to-Gate | 0,4394 kg COe / 1 Piece |


# Technical data sheet

## Clamp clip, single, ALU plastic pressure trough

Item number: 1184040



### Dimensions

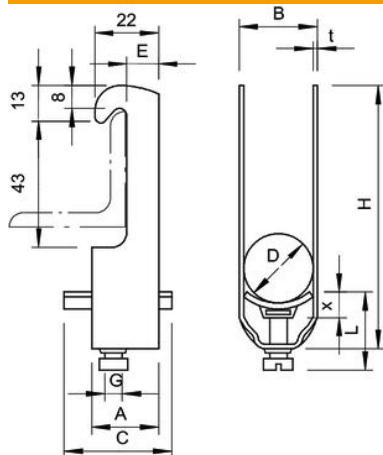

|                  |         |
|------------------|---------|
| Dimension A      | 23 mm   |
| Dimension B      | 39 mm   |
| Dimension C      | 34 mm   |
| Dimension E      | 11 mm   |
| Dimension G (mm) | M8      |
| Dimension H      | 99 mm   |
| Dimension L      | 31.5 mm |
| Dimension t      | 2 mm    |
| Dimension x      | 5.5 mm  |

### Technical data

|                            |               |
|----------------------------|---------------|
| Number of cables/pipes     | 1             |
| for 1 cable H              | 99 mm         |
| for 1 cable L              | 31.5          |
| For pipe diameter, max.    | 32 mm         |
| For pipe diameter, min.    | 32 mm         |
| Halogen-free               | yes           |
| Max. Tightening torque     | 2 Nm          |
| With plastic trough        | yes           |
| With metal trough          | no            |
| Mounting type              | Angle profile |
| Impact-resistant           | no            |
| Clamping range D, max.     | 34 mm         |
| Clamping range D, min.     | 28 mm         |
| Surface addition           | Untreated     |
| Material addition          | Aluminium     |
| With counter-trough        | no            |
| Material of trough         | Plastic       |
| Material quality of trough | Polypropylene |