

Technical data sheet

Spacer clip 733 ALU

Item number: 1362804



Spacer clip for the installation of pipes and cables on walls, ceilings and floors.
With self-locking upper part. Fastening via slot.



Alu Aluminium

Master data

| | |
|------------------------------------|--------------------------|
| Item number | 1362804 |
| Type | ASL 733 10 ALU |
| Description 1 | Distance saddle |
| Description 2 | with slot |
| Manufacturer | OBO |
| Dimension | 8-10mm |
| Material | Aluminium |
| Smallest sales unit | 25 |
| Unit of quantity | Piece |
| Weight | 0.917 kg |
| Weight unit | kg/100 pc. |
| CO2 Footprint (GWP) Cradle-to-Gate | 0,1355 kg CO2e / 1 Piece |


Technical data sheet

Spacer clip 733 ALU

Item number: 1362804



Dimensions

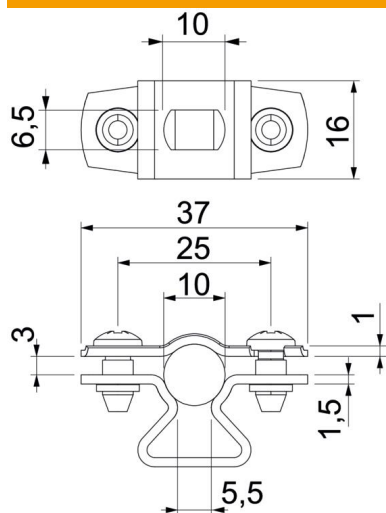

| | |
|-------------------|--------|
| Dimension A | 37 mm |
| Dimension B | 25 mm |
| Dimension b | 16 mm |
| Dimension D | 10 mm |
| Dimension d max. | 10 mm |
| Dimension d min. | 8 mm |
| Dimension L | 10 mm |
| Dimension s | 5.5 mm |
| Dimension t1 (mm) | 1 |
| Dimension t2 (mm) | 1.5 |
| Dimension x | 3 mm |

Technical data

| | |
|------------------------|------------|
| Distance to the wall | yes |
| Number of cables/pipes | 1 |
| Version for | Closed |
| Fastening type | Screw hole |
| For diameter | 8 - 10 |
| Halogen-free | yes |
| Plastic-covered | no |
| Material thickness | 1.5 mm |
| Clamping range D, max. | 10 mm |
| Clamping range D, min. | 8 mm |
| UV-resistant | yes |