

Technical data sheet

Junction box X 06 with main terminal block

Item number: 2005304



Junction box with terminal for the connection of cables and lines indoors and in outdoor areas. Rectangular design with knock-out entries. Suitable for wall and ceiling mounting with the option to fasten outside, inside or to mount via the corner domes. Particularly impact resistant with IK09. Cover with quick lock, sealable. Made from halogen-free and UV-resistant materials.

Including 4-pole main terminal block with 2 x 35 mm² + 2 x 16 mm² cable connection cross-sections per pole. Junction box according to DIN EN 60670. Flame-resistant to DIN EN 60695/2/11, test temperature 650 °C. Impact resistance IK09 according to DIN EN 50102. Protection rating IP67 according to DIN EN 60529.



PC Polycarbonate

Master data

| | |
|------------------------------------|---------------------------|
| Item number | 2005304 |
| Type | X06 H25 GP4 LGR |
| Description 1 | Junction box |
| Description 2 | Main line branch terminal |
| Manufacturer | OBO |
| Dimension | 150x116x86 |
| Colour | Light grey; RAL 7035 |
| Material | Polycarbonate |
| Smallest sales unit | 1 |
| Unit of quantity | Piece |
| Weight | 56.8 kg |
| Weight unit | kg/100 pc. |
| CO2 Footprint (GWP) Cradle-to-Gate | 1,4982 kg CO2e / 1 Piece |


Technical data sheet

Junction box X 06 with main terminal block


Item number: 2005304



Dimensions

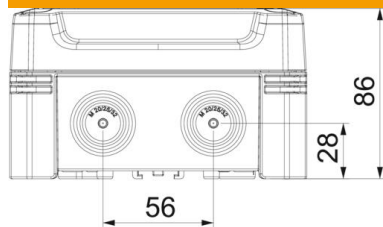

| | |
|--------|--------|
| Length | 151 mm |
| Width | 117 mm |
| Height | 86 mm |

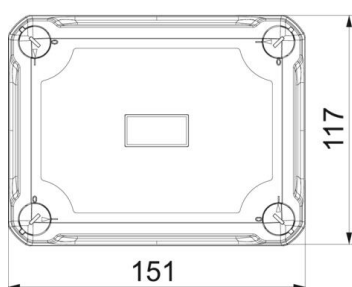

Technical data

| | |
|-----------------------------------|---|
| Expandable | yes |
| No. of entries | 8 |
| Type of entry | Cuttable stepped membrane |
| Type of housing penetration | Pre-marking |
| Measured insulation voltage V_i | 750 V |
| Cover | Not transparent |
| Cover fastening | Screwed |
| Entry from rear | no |
| Entries | 4 x $\varnothing 20/25$, 4 x $\varnothing 20/25/32$ |
| Explosion-tested version | no |
| Flame-resistant | acc. to VDE 0471/DIN 695 Part 2-1, test temperature 650°C |
| Shape | Rectangular |
| Fibre-glass reinforced | yes |
| Halogen-free | yes |
| Clear internal dimensions | 137x105x68 mm |
| Max. Conductor cross-section | 25 mm ² |
| With screening | no |
| with lid | yes |
| Mounting type | Wall/ceiling mounting |
| Nominal cross-section, max. | 6 mm ² |
| Nominal cross-section, min. | 2.5 mm ² |
| Nominal voltage | 750 V |
| Sealable | yes |
| Impact-resistant | yes |
| Protection rating | IP67 |
| Protection rating IK code | IK09 |
| Permitted temperature range, max. | 60 °C |

Technical data sheet

Junction box X 06 with main terminal block

Item number: 2005304



Technical data

| | |
|-----------------------------------|-------|
| Permitted temperature range, min. | -5 °C |
| Transparent lid | no |
| Weatherproof | yes |