


Technical data sheet

Protection conductor terminal, with screw contacts, 12 terminals

Item number: 2054094



Protective conductor connection terminal with 7 terminals up to 16 mm².

Clamping rail, brass, steel screws, electrogalvanised and transparently passivated, for snapping onto 35 x 7.5 mm hat profile rails to DIN EN 60715 (previously DIN EN 50022) (transverse) or flat rails 10 x 2–2.5 mm (lengthwise).



PA Polyamide

Master data

| | |
|---------------------|-------------------------------|
| Item number | 2054094 |
| Type | 60 S 12x16 GN |
| Description 1 | Protective conductor terminal |
| Manufacturer | OBO |
| Dimension | 12x16mm ² |
| Colour | Green |
| Material | Polyamide |
| Smallest sales unit | 10 |
| Unit of quantity | Piece |
| Weight | 4.2 kg |
| Weight unit | kg/100 pc. |


Technical data sheet

Protection conductor terminal, with screw contacts, 12 terminals

Item number: 2054094



Dimensions

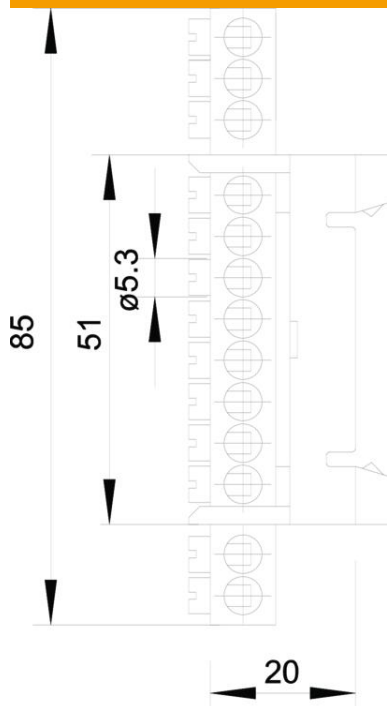

| | |
|--------|-------|
| Length | 85 mm |
| Height | 20 mm |

Technical data

| | |
|------------------------------------|--|
| Closing plate required | no |
| No. of terminals | 12 |
| Explosion-tested version | no |
| Suitable for flexible conductors | no |
| Suitable for solid conductors | no |
| Suitable for multi-wire conductors | no |
| Mounting type | DIN rail 35 mm |
| Nominal cross-section, max. | 16 mm ² |
| Nominal cross-section, min. | 10 mm ² |
| Pole number | 12 |
| Cross-section | 12 terminals to 16 mm ² mm ² |