


# Technical data sheet

## Flat conductor terminal from FL 30 for 1801 VDE

Item number: 5015774

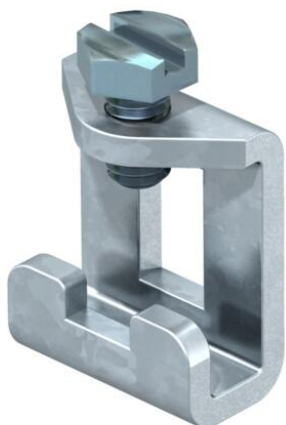

- For flat conductors from FL 30
- 2 terminals always required for each flat conductor connection
- Lightning current carrying capacity 100 kA (10/350)
- Electrogalvanized steel



**St** Steel

**G** Electrogalvanized

### Master data

|                                    |                            |
|------------------------------------|----------------------------|
| Item number                        | 5015774                    |
| Type                               | 1801 RK40                  |
| Description 1                      | Series terminal            |
| Description 2                      | for equipotential busbar   |
| Manufacturer                       | OBO                        |
| Dimension                          | 40mm                       |
| Material                           | Steel                      |
| Surface                            | Electrogalvanized          |
| Surface standard                   | EN ISO 19598 / EN ISO 4042 |
| Smallest sales unit                | 1                          |
| Unit of quantity                   | Piece                      |
| Weight                             | 7.3 kg                     |
| Weight unit                        | kg/100 pc.                 |
| CO2 Footprint (GWP) Cradle-to-Gate | 0,1581 kg CO2e / 1 Piece   |



# Technical data sheet

Flat conductor terminal from FL 30 for 1801 VDE



Item number: 5015774



## Dimensions

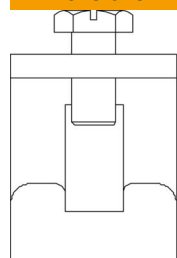

Width 30 mm



## Technical data

|                                          |           |
|------------------------------------------|-----------|
| Connection options                       | FL 40 x 5 |
| Suitable for ribbon conductor connection | yes       |
| Suitable for round cable connection      | no        |
| Suitable for sector conductor connection | no        |
| Dividing unit TE (10 mm)                 | 5         |
| Suitable for busbar                      | Other     |