

Technical data sheet

Folding and construction clamp, 12 mm

Item number: 5304407



- Flange thickness to 12 mm
- With pre-mounted fix contact clamping screw 5000
- 2 hexagonal bolts M8 x 20, bolts made of hot galvanised steel
- Terminal block made of malleable iron, hot galvanised
- Mounting of the round conductors either vertical or transverse to structure
- Corresponds to the requirements of DIN VDE 0185-305-3



SG

cast steel

FT

Hot-dip galvanised

Master data

| | |
|------------------------------------|--------------------------|
| Item number | 5304407 |
| Type | 5004 DIN-FT 12 |
| Description 1 | Folding clamp |
| Description 2 | fix contact |
| Manufacturer | OBO |
| Dimension | 12mm |
| Material | cast steel |
| Surface | Hot-dip galvanised |
| Surface standard | DIN EN ISO 1461 |
| Smallest sales unit | 10 |
| Unit of quantity | Piece |
| Weight | 18.73 kg |
| Weight unit | kg/100 pc. |
| CO2 Footprint (GWP) Cradle-to-Gate | 0,5329 kg CO2e / 1 Piece |


Technical data sheet

Folding and construction clamp, 12 mm


Item number: 5304407



Dimensions

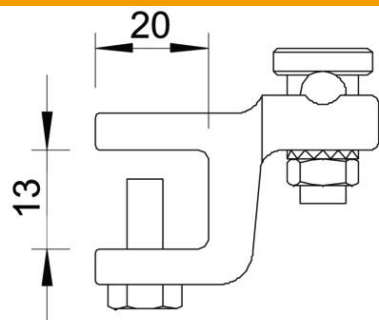

| | |
|-------------|-------|
| Dimension L | 55 mm |
| Dimension t | 20 mm |

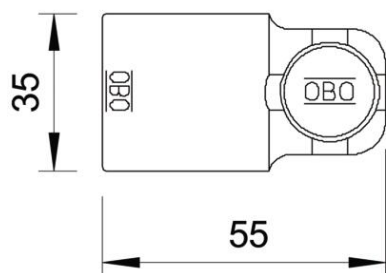

Technical data

| | |
|-------------------------------------|-----------------|
| Type of fastening screw | Clamping screw |
| Type of connector | Clamp connector |
| Lightning current carrying capacity | N/50 kA |
| Suitable for connection | Miscellaneous |
| Fit | Rd 8-10 mm |
| Intermediate plate | no |
| Clamping range, max. | 12 mm |