


Technical data sheet

Straight connector Rd 8 mm

Item number: 5329078



- With truss-head bolt M10 x 30 and hexagonal nut M10
- Complies with the requirements of VDE 0185-305-3 (IEC/ EN 62305-3)

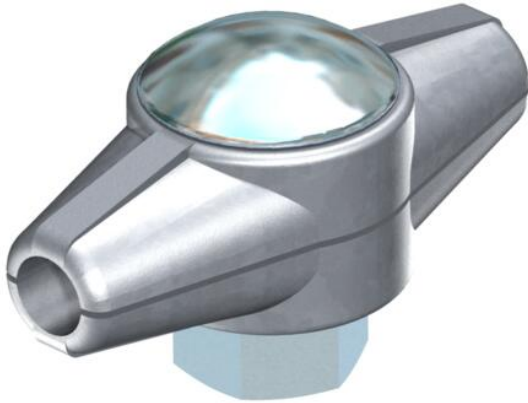

Zn Die-cast zinc

G Electrogalvanized

Master data



Item number	5329078
Type	239
Description 1	Connector
Manufacturer	OBO
Dimension	8mm
Material	Die-cast zinc
Surface	Electrogalvanized
Surface standard	EN ISO 19598 / EN ISO 4042
Smallest sales unit	20
Unit of quantity	Piece
Weight	12.51 kg
Weight unit	kg/100 pc.
CO2 Footprint (GWP) Cradle-to-Gate	0,7638 kg CO2e / 1 Piece

Technical data sheet

Straight connector Rd 8 mm

Item number: 5329078

Dimensions

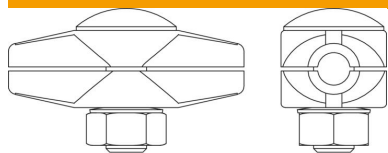

Technical data

Type of fastening screw	Gutter bolt
Type of connector	Connectors
Lightning current carrying capacity	N/50 kA
Flat conductor width, conductor 1, max.	8 mm
Flat conductor width, conductor 1, min.	8 mm
Suitable for connection	Round conductor Rd 8 / Rd 8
Fit	Rd 8 mm
Round conductor diameter, conductor 1, max.	8 mm
Round conductor diameter, conductor 1, min.	8 mm
Intermediate plate	no