

Technical data sheet

isFang tripod with side outlet

Item number: 5408930



- Screwless installation of freestanding air-termination rods as well as insulated air-termination rods with 50 mm diameter
- E.g. for internal OBO isCon® conductor
- Roof slope to max. 5 degrees
- Incl. Rd 8–10 crossbar for quick round conductor fastening
- Concrete plinths as well as threaded rods should be ordered separately




A2 Stainless steel

Master data

Item number	5408930
Type	isFang 3B-100-A
Description 1	Tripod stand + outlet
Description 2	for isCon conductor, internal
Manufacturer	OBO
Dimension	1,3x1,4m
Material	Stainless steel 1.4301
Smallest sales unit	1
Unit of quantity	Piece
Weight	610 kg
Weight unit	kg/100 pc.
CO2 Footprint (GWP) Cradle-to-Gate	4,1733 kg CO2e / 1 Piece

Dimensions

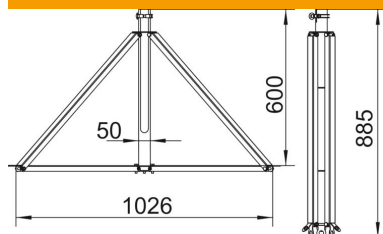

Length	600 mm
Width	1,026 mm
Height	885 mm
Dimension B	1,026 mm
Dimension d min.	50 mm
Dimension H	885 mm
Dimension L	600 mm

Technical data sheet

isFang tripod with side outlet

Item number: 5408930



Technical data

Air-termination rod holder	Screwless
Version for	Stand