

Technical data sheet

Cable carrier trough, single, for individual routing

Item number: 6006890



Cable support brackets for quick and easy routing of cables in areas where common cable support systems cannot be installed due to lack of space. The cable support brackets possess a large load-bearing surface as well as rounded outer edges to protect the cables. In accordance with DIN VDE 0298-300, a maximum support spacing of 0.8 m should not be exceeded.



St Steel

FT Hot-dip galvanised

Master data

Item number	6006890
Type	KTW 100 FT
Description 1	Cable support trough
Description 2	for single routing
Manufacturer	OBO
Dimension	44x200x113
Colour	zinc
Material	Steel
Surface	Hot-dip galvanised
Surface standard	DIN EN ISO 1461
Smallest sales unit	1
Unit of quantity	Piece
Weight	48 kg
Weight unit	kg/100 pc.
CO2 Footprint (GWP) Cradle-to-Gate	1,2123 kg CO2e / 1 Piece


Technical data sheet

Cable carrier trough, single, for individual routing



Item number: 6006890

Dimensions

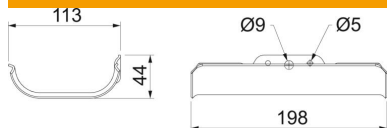

Length	198 mm
Width	113 mm
Height	44 mm
Plate thickness	2 mm

Technical data

Number of troughs	0 St.
Version for	Single
F in kN per trough	0.35 kN
With fastening material	no
Adjustable	no
Wannenhöhe	44 mm