

Technical data sheet

Socket 0°, Connect 80, protective contact, single

Item number: 6120412



Protective contact socket with connection to side, Single 0°, with increased touch protection, with screwless terminals, 2-pin, 16 A, 250 V~, with connection terminals to IEC 60884-1, suitable for the installation in Rapid 80 device installation trunking system.

For installation in Rapid 45 trunking, device installation trunking, service poles, underfloor systems and desk boxes.



PC Polycarbonate

Master data

| | |
|------------------------------------|--------------------------------|
| Item number | 6120412 |
| Type | STD-D0C8 RW1 |
| Description 1 | Socket 0°, single |
| Description 2 | protective contact, Connect 80 |
| Manufacturer | OBO |
| Dimension | 250V, 10/16A |
| Colour | Pure white; RAL 9010 |
| Material | Polycarbonate |
| Smallest sales unit | 1 |
| Unit of quantity | Piece |
| Weight | 8.5 kg |
| Weight unit | kg/100 pc. |
| CO2 Footprint (GWP) Cradle-to-Gate | 0,4462 kg CO2e / 1 Piece |


Technical data sheet

Socket 0°, Connect 80, protective contact, single

Item number: 6120412



Dimensions

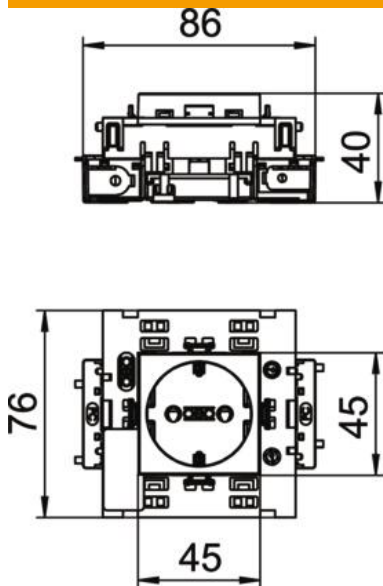

| | |
|--------|-------|
| Width | 86 mm |
| Height | 76 mm |

Technical data

| | |
|--|--------------------|
| Cover | Central plate |
| Closable | no |
| Connection type | Screwless terminal |
| Number of units | 1 |
| Number of modules (for modular construction) | 0 |
| Number of switchable sockets | 0 |
| Number of poles | 2 |
| Printed label/coding | Without printing |
| Version for | Single 0° |
| Surface version | Matt |
| Version for | SCHUKO |
| Ejection mechanism | no |
| Fastening type | Lock |
| Labelling panel | no |
| Operating temperature, max. | 40 °C |
| Operating temperature, min. | -5 °C |
| increased touch protection | yes |
| Error current protection | no |
| For more difficult conditions (according to VDE) | no |
| Power reserve | no |
| Halogen-free | yes |
| Insulated installation | no |
| Hinged cover | no |
| Coding | no |
| Warning light | no |
| With on/off switch | no |

Technical data sheet

Socket 0°, Connect 80, protective contact, single

Item number: 6120412



Technical data

| | |
|---------------------------|------------------------------|
| With fine-wire fuse | no |
| With functional lighting | no |
| With orientation lighting | no |
| Mounting type | Device installation duct |
| Nominal voltage | 250 V |
| Nominal current | 16 A |
| Protection rating | Other |
| Special power supply | Without special power supply |
| Socket version | Protective contact |
| Socket angle | 0° |
| Depth | 42 mm |
| Transparent | no |
| Rotated central insert | no |
| Surge protection | no |