

# Technical data sheet

## End piece, trunking type WDKH 10020

Item number: 6175540



End piece for closing the WDKH trunking.  
The end pieces are pushed onto the trunking and kept in place by the spring action.



**PC/ABS** Polycarbonate/Acrylnitrile-butadiene-styrene

### Master data

|                                    |  |
|------------------------------------|--|
| Item number                        | 6175540                                      |
| Type                               | WDKH-E10020RW                                |
| Description 1                      | End piece                                    |
| Description 2                      | halogen-free                                 |
| Manufacturer                       | OBO  |
| Dimension                          | 10x20mm                                      |
| Colour                             | Pure white; RAL 9010                         |
| Material                           | Polycarbonate/Acrylnitrile-butadiene-styrene |
| Smallest sales unit                | 10   |
| Unit of quantity                   | Piece  |
| Weight                             | 0.092 kg                                     |
| Weight unit                        | kg/100 pc.                                   |
| CO2 Footprint (GWP) Cradle-to-Gate | 0,0127 kg CO2e / 1 Piece                     |


# Technical data sheet

End piece, trunking type WDKH 10020

Item number: 6175540



## Dimensions

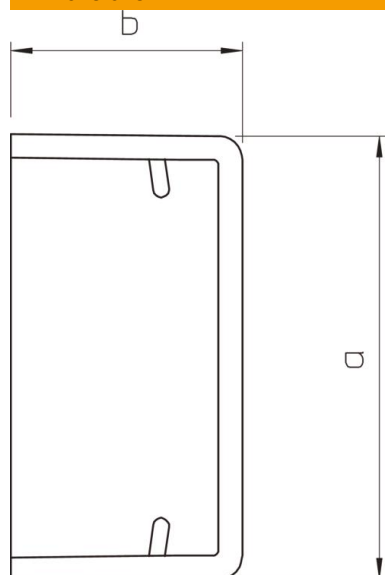

|             |       |
|-------------|-------|
| Length      | 11 mm |
| Width       | 22 mm |
| Height      | 10 mm |
| Dimension a | 22 mm |
| Dimension b | 11 mm |

## Technical data

|                                   |            |
|-----------------------------------|------------|
| Version for                       | Left/right |
| Fastening type                    | Lockable   |
| Maintain electrical functions     | no         |
| Halogen-free                      | yes        |
| Protection rating                 | IP30       |
| Protective film                   | no         |
| Protection rating IK code         | IK07.      |
| Permitted temperature range, max. | 90 °C      |
| Permitted temperature range, min. | -5 °C      |