

# Technical data sheet

## Trunking, type WDK 80210

Item number: 6191312



Wall installation trunking as trunking base with base perforation and matching trunking cover.  
Four cover fixing devices included.  
The lid clamp can be moved along the entire length of the trunking.



**PVC** Polyvinylchloride

### Master data

Item number	6191312
Type	WDK80210RW
Description 1	Wall trunking system
Description 2	with base perforation
Manufacturer	OBO
Dimension	80x210x2000
Colour	Pure white; RAL 9010
Material	Polyvinylchloride
Smallest sales unit	8
Unit of quantity	Metre
Weight	240 kg
Weight unit	kg/100 m
CO2 Footprint (GWP) Cradle-to-Gate	5,565 kg CO2e / 1 Meter


# Technical data sheet

Trunking, type WDK 80210

Item number: 6191312



## Dimensions

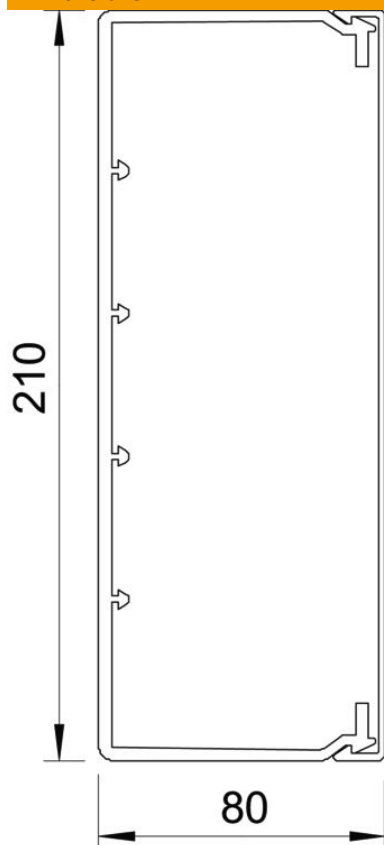

Length	2,000 mm
Width	210 mm
Height	80 mm

# Technical data sheet

Trunking, type WDK 80210

Item number: 6191312



## Technical data

Number of fixed partitions	0
Number of cables NYM 3 x 1.5 mm <sup>2</sup> Ø 10.5 mm (without socket)	80
Number of cables NYM 3 x 2.5 mm <sup>2</sup> Ø 11.5 mm (without socket)	67
Number of cables NYM 5 x 1.5 mm <sup>2</sup> Ø 12.0 mm (without socket)	61
Number of insertable partitions	2
Version, cable trunking cover	Loose
Fastening type	Base perforation
Maintain electrical functions	no
Halogen-free	no
Cable retaining clip	yes
Duct connector	no
Delivery on a roll	no
Usable cross-section	13980 mm <sup>2</sup>
Protection rating	IP30
Protective film	no
Protection rating IK code	IK04
Permitted temperature range, max.	60 °C
Permitted temperature range, min.	-5 °C