


Technical data sheet

Flat angle, for cable trunking type LKM 60200

Item number: 6249523



Flat angle including cover for changing the direction of the LKM ducts.
Equipotential bonding without additional aids, between base and cover

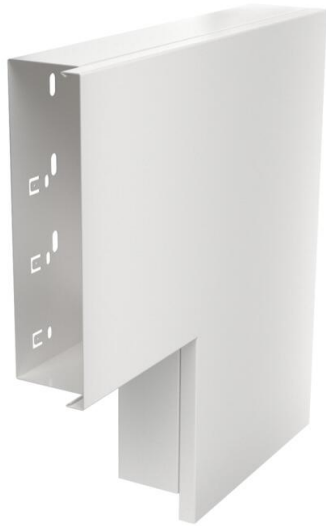

- St** Steel
- FSK** Strip galvanized / plastic coated

Master data

| | |
|------------------------------------|-----------------------------------|
| Item number | 6249523 |
| Type | LKM F60200RW |
| Description 1 | Flat angle |
| Description 2 | with cover |
| Manufacturer | OBO |
| Dimension | 60x200mm |
| Colour | Pure white; RAL 9010 |
| Material | Steel |
| Surface | Strip galvanized / plastic coated |
| Surface standard | DIN EN 10346 |
| Smallest sales unit | 1 |
| Unit of quantity | Piece |
| Weight | 154.4 kg |
| Weight unit | kg/100 pc. |
| CO2 Footprint (GWP) Cradle-to-Gate | 6,4116 kg CO2e / 1 Piece |


Technical data sheet

Flat angle, for cable trunking type LKM 60200

Item number: 6249523



Dimensions

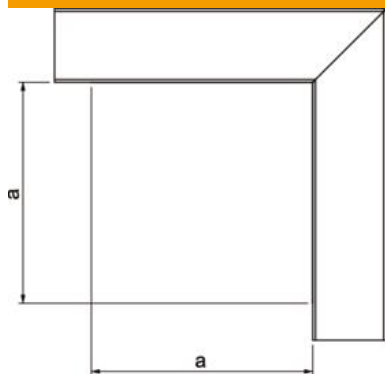

| | |
|-------------|--------|
| Length | 340 mm |
| Width | 200 mm |
| Height | 64 mm |
| Dimension a | 140 mm |

Technical data

| | |
|--|------------------|
| Version for | Base and cover |
| Fastening type | Base perforation |
| Maintain electrical functions for duct dimension | no 60 x 200 |
| Halogen-free | yes |
| Duct height, min. | 64 mm |
| Trunking depth | 64 mm |
| Protection rating | IP30 |
| Protective film | no |
| Protection rating IK code | IK10 |
| Self-extinguishing | no |
| Permitted temperature range, max. | 90 °C |
| Permitted temperature range, min. | -5 °C |
| Angle range, max. | 90 mm |
| Angle range, min. | 90 mm |