

# Technical data sheet

## Cover Rapid 80, opal, smooth

Item number: 6278690



Trunking cover for closing Rapid 80 GK (PVC), GS (steel) and GA (aluminium) device installation trunking as well as ISS service poles with a 76.5 mm system opening. The GK-OTGO cover is made from translucent but milky plastic (looking like cut glass) and is therefore suitable for integrating lighting in the trunking or service poles.



PC Polycarbonate

### Master data

Item number	6278690
Type	GK-OTGO
Description 1	Cover
Description 2	smooth opal
Manufacturer	OBO
Dimension	80x2000mm
Colour	Transparent
Material	Polycarbonate
Smallest sales unit	2
Unit of quantity	Metre
Weight	21.8 kg
Weight unit	kg/100 m
CO2 Footprint (GWP) Cradle-to-Gate	0,8038 kg CO2e / 1 Meter


# Technical data sheet

Cover Rapid 80, opal, smooth

Item number: 6278690



## Dimensions

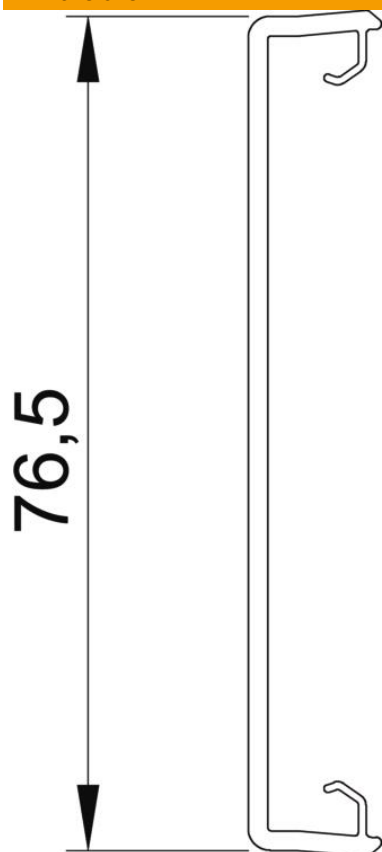

Length	2,000 mm
Width	76.5 mm
Height	12 mm

## Technical data

Version for	Smooth
Halogen-free	no
Cover mounting type	Internal
Protection rating	IP30
Protective film	yes
Protection rating IK code	IK08
Permitted temperature range, max.	60 °C
Permitted temperature range, min.	-15 °C