


Technical data sheet

Compressed air tap for industrial pole

Item number: 6290495



Tap to take off compressed air from the ISS industrial pole profile. The compressed air tap has a G 1/2 (ISO 228-1) threaded hole to accept a standard compressed air coupling. The unit can be mounted onto the pole profile using slot nuts and fastening screws. For the creation of an appropriate outlet for the compressed air a drilling template is supplied.

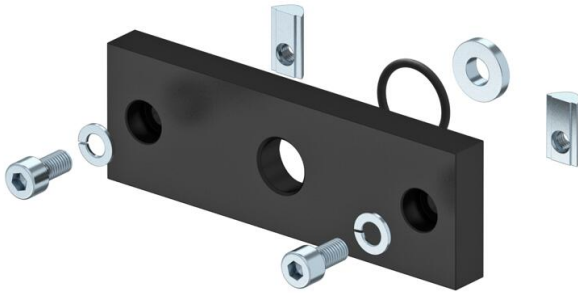

Alu Aluminium

Master data

| | |
|------------------------------------|--------------------------|
| Item number | 6290495 |
| Type | ISS160160DLA |
| Description 1 | Compressed air tap |
| Description 2 | for ISS, industry |
| Manufacturer | OBO |
| Dimension | 152x50x15mm |
| Colour | Jet black; RAL 9005 |
| Material | Aluminium |
| Smallest sales unit | 1 |
| Unit of quantity | Piece |
| Weight | 30 kg |
| Weight unit | kg/100 pc. |
| CO2 Footprint (GWP) Cradle-to-Gate | 3,9956 kg CO2e / 1 Piece |


Technical data sheet

Compressed air tap for industrial pole


Item number: 6290495



Dimensions

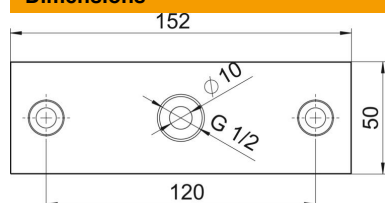

| | |
|--------|--------|
| Length | 152 mm |
| Width | 50 mm |
| Height | 15 mm |



Technical data

| | |
|-----------------------------------|---------------|
| Version for | Miscellaneous |
| Halogen-free | yes |
| Protection rating | IP30 |
| Protection rating IK code | IK10 |
| Permitted temperature range, max. | 60 °C |
| Permitted temperature range, min. | -25 °C |