

Technical data sheet

Ceramic terminal, double

Item number: 7205707



High-temperature-resistant ceramic terminal with four connection options for refitting of the FireBox T series. Tested according to DIN EN 60998-2-1:2004.



Steatite

Master data	
Item number	7205707
Type	TK 16-2
Description 1	Ceramic terminal
Description 2	for FireBox T
Manufacturer	OBO
Dimension	16 mm²
Colour	Cream
Material	Steatite
Smallest sales unit	5
Unit of quantity	Piece
Weight	6.4 kg
Weight unit	kg/100 pc.
CO2 Footprint (GWP) Cradle-to-Gate	0,005 kg CO2e / 1 Piece


Technical data sheet

Ceramic terminal, double

Item number: 7205707



Dimensions

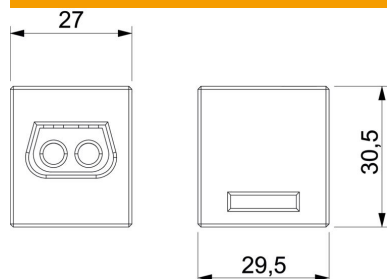

Length	27 mm
Width	29.5 mm
Height	30.5 mm

Technical data

Closing plate required	no
Connectable conductor cross-section, single-wire, max.	10 mm ²
Connectable conductor cross-section, single-wire, min.	6 mm ²
Connectable conductor cross-section, multi-wire, max.	16 mm ²
Connectable conductor cross-section, multi-wire, min.	6 mm ²
Connection position	Side
No. of terminals	4
Number of screwless terminals per pole	4
Version of electrical connection 1	Screw connection
Version of electrical connection 2	Screw connection
Explosion-tested version	no
Insulation material	Ceramic
Mounting type	Miscellaneous
Nominal cross-section, max.	16 mm ²
Nominal cross-section, min.	6 mm ²
Nominal voltage	400 V
Nominal current	76 A
Pole number	1
Permitted temperature range, max.	250 °C
Permitted temperature range, min.	0 °C
Transparent	no