

# Technical data sheet

Height-adjustable heavy-duty cassette, blank, RKRSL, nominal size R7, stainless steel  
Item number: 7409094



Round, "blank", heavy-duty cassette of nominal size R7 for the creation of an inspection opening in trunking systems, raised and cavity floors, in dry or wet-cleaned floors for indoor use. Load class 2 to 20 kN. Only suitable for smooth floor coverings.

Height-adjustable heavy-duty cassette as a blind cassette with a load bearing capacity of 2–20 kN, 3-compartment for indoor use. 2 APMT2 cover plates and 1 APMT5 cover plate can be installed. For the installation of 2 UT3 universal supports and one UT4 universal support for 7 individual installation devices with support ring/support clamp or 10 Modul 45 devices.



A2 Stainless steel

## Master data

|                                    |                           |
|------------------------------------|---------------------------|
| Item number                        | 7409094                   |
| Type                               | RKR2 7SL2 V2 25           |
| Description 1                      | Heavy-duty cassette       |
| Description 2                      | blank, 20 kN              |
| Manufacturer                       | OBO                       |
| Dimension                          | Ø275mm                    |
| Material                           | Stainless steel 1.4301    |
| Smallest sales unit                | 1                         |
| Unit of quantity                   | Piece                     |
| Weight                             | 966 kg                    |
| Weight unit                        | kg/100 pc.                |
| CO2 Footprint (GWP) Cradle-to-Gate | 20,4004 kg CO2e / 1 Piece |


# Technical data sheet

Height-adjustable heavy-duty cassette, blank, RKRSL, nominal size R7, stainless steel

Item number: 7409094



## Dimensions

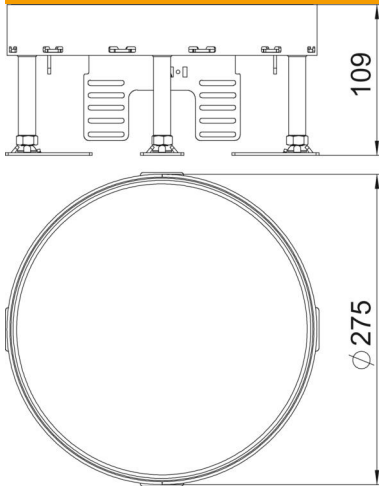

|             |        |
|-------------|--------|
| Dimension h | 109 mm |
|-------------|--------|

## Technical data

|                                            |                 |
|--------------------------------------------|-----------------|
| Number of installable devices              | 0               |
| Version for                                | Round           |
| Cable outlet version                       | No cable outlet |
| Floor care                                 | Wet             |
| Decouplable                                | no              |
| Floor height, max.                         | 159 mm          |
| Floor height, min.                         | 109 mm          |
| Suitable for raised floor installation     | yes             |
| Suitable for cavity floor installation     | yes             |
| Suitable for underfloor box                | 350             |
| Device support to accept mounting boxes    | yes             |
| Nominal size for device installation units | R7              |
| Height-adjustment range, max.              | 159 mm          |
| Height-adjustment range, min.              | 109 mm          |
| Protection rating (IP) when used           | IP00            |
| Protection rating (IP) when unused         | IP44            |
| Protection rating IK code                  | IK10            |
| Heavy-duty version                         | yes             |
| Heavy load class                           | 20 kN (OBO SL2) |
| Installation system type                   | UT3 / UT4       |
| Floor covering thickness                   | 25 mm           |