

Technical data sheet

UDHOME2 floor socket, with brush bar, with floor covering recess, with FLF support, cover, stainless steel
Item number: 7427042



Square installation unit for use in dry-care cavity and screed floors in indoor areas.

Installation housing with pre-marked insertion openings for pipes (M20/M25). Cover adjustable to top edge of floor covering using four height-adjustment supports. The minimum installation depth is 100 mm, the height adjustment range is +35 mm. Flushfloor cable outlet through brush bar. Device support made of galvanised sheet steel for one FLF 6/5 (or 2x FLF 3/5) and one FLF 3/5. Cover, can be covered with floor covering, 15 mm



A2 Stainless steel

Master data


Item number	7427042
Type	UDHOME2 BV15 FLF
Description 1	Floor socket
Description 2	for FLF devices, 15mm recess
Manufacturer	OBO
Dimension	140x140x100
Material	Stainless steel 1.4301
Smallest sales unit	1
Unit of quantity	Piece
Weight	220 kg
Weight unit	kg/100 pc.
CO2 Footprint (GWP) Cradle-to-Gate	12,5898 kg CO2e / 1 Piece

Technical data sheet


UDHOME2 floor socket, with brush bar, with floor covering recess, with FLF support, cover, stainless steel
 Item number: 7427042



Dimensions

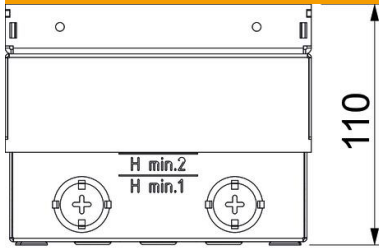

Length	140 mm
Width	140 mm
Height	100 mm

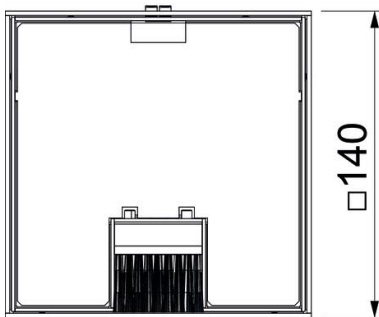

Technical data

Number of installable devices	3
Version for	Square
Cable outlet version	Brush bar
Equipment	Empty housing for FLF socket
Floor covering protection frame	no
Floor care	Dry
Cover version	Floor covering recess
Seal installation option	no
Application when used	6.101.1 Dry floor care
Application when unused	6.101.1 Dry floor care
Floor height, max.	135 mm
Floor height, min.	100 mm
Suitable for raised floor installation	yes
Suitable for screed-flush closed underfloor ducts	no
Suitable for screed-covered underfloor ducts	no
Suitable for cavity floor installation	yes
Suitable for wet care	no
Device support to accept mounting boxes	no
With floor covering recess	yes
Frame version	Floor covering contact edge
Protection rating (IP) when used	IP20
Protection rating (IP) when unused	IP40

Technical data sheet

UDHOME2 floor socket, with brush bar, with floor covering recess, with FLF support, cover, stainless steel
Item number: 7427042



Technical data

Protection rating IK code	IK10
Heavy-duty version	no
Vertical load, large area	to 15,000 N
Vertical load, small area	to 3,000 N
Floor covering thickness	15 mm