

Technical data sheet

Mounting lid UKL4

Item number: 7428538



Cavity floors are usually equipped with round flush-mount units. The installation openings required for this are created either using crown drills or using a screed protection cover. Beneath the screed plate, the cables are run freely to the service outlets and cassettes without cable routing systems.



St Steel

FS Strip galvanized

Master data

Item number	7428538
Type	DUG UKL4
Description 1	Mounting lid
Description 2	UKL4 in HB
Manufacturer	OBO
Dimension	370x230x26
Material	Steel
Surface	Strip galvanized
Surface standard	DIN EN 10346
Smallest sales unit	1
Unit of quantity	Piece
Weight	114 kg
Weight unit	kg/100 pc.
CO2 Footprint (GWP) Cradle-to-Gate	3,9601 kg CO2e / 1 Piece


Technical data sheet

Mounting lid UKL4

Item number: 7428538



Dimensions

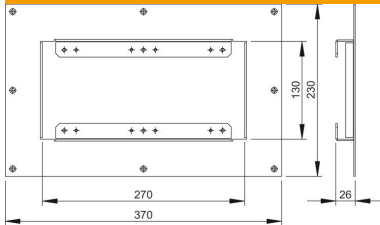

Length	370 mm
Width	230 mm