


Technical data sheet

Socket 0°, Connect 45, protective contact, triple

Item no. 6120390

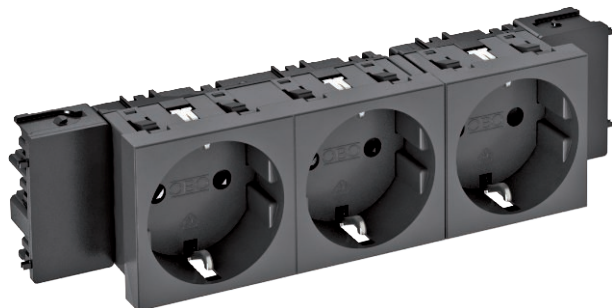

Protective contact socket with connection to side, Triple 0°, with increased touch protection, with screwless terminals, 2-pin, 16 A, 250 V~, with connection terminals to IEC 60884-1, suitable for the installation in Rapid 45 device installation trunking systems.

For installation in Rapid 45 trunking, device installation trunking, service poles, underfloor systems and desk boxes.




PC Polycarbonate

Master data

Item no.	6120390
Type	STD-D0C SWGR3
Description 1	Socket 0°, triple
Description 2	protective contact, Connect 45
Dimension	250V, 10/16A
Colour	Black-grey
RAL number	7021
Material	Polycarbonate
Material symbol	PC
Smallest sales unit (VG)	1 Piece
Weight	16,50 kg/100 pc.

Technical data

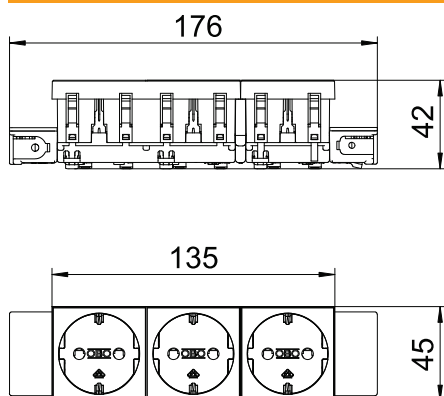

Width	176,00 mm
Height	45,00 mm
Depth	42,00 mm
Cover	Central plate
Closable	☐
Connection type	Screwless terminal
Printed label/coding	Without printing
Version	Triple 0°
Version	Socket 0°, triple, protective contact, Connect 45
Surface version	Matt
Sockets/switch version	SCHUKO
Version for	SCHUKO
Number of poles	2
Number of units	3
Number of modules (for modular construction)	0
Number of switchable sockets	0
Ejection mechanism	☐
Fastening type	Lock
Labelling panel	☐
Operating temperature	-5,00 - 40,00 °C
Error current protection	☐
For more difficult conditions (according to VDE)	☐
Power reserve	☐
Halogen-free	☒
Insulated installation	☐
Increased touch protection	☒
Hinged cover	☐
Coding	No
Warning light	☐

Technical data sheet

Socket 0°, Connect 45, protective contact, triple

Item no. 6120390



Technical data

With on/off switch	☐
With fine-wire fuse	☐
With functional lighting	☐
With orientation lighting	☐
Mounting type	Device installation duct
Nominal voltage	250,00 V
Nominal current	16,00 A
Protection rating	Other
Special power supply	Without special power supply
Socket version	Schutzkontakt
Socket angle	0°
Transparent	☐
Surge protection	☐
Rotated central insert	☐