

# Technical data sheet

## Head plate US 5

Item no. 6348904



Head plate for mounting on US 5 supports. In combination with the US 5 support, suspended supports of any length can be created in situ. Also suitable for fixing vertical ladders, type SLM 50.

The head plate can be mounted to fixed lengths of the U support, type US 5. The spacer, type DSK 45, is used to install the head plate.




<b>St</b>	Steel
<b>FT</b>	Hot-dip galvanised

### Master data

Item no.	6348904
Type	KUS 5 FT
Description 1	Head plate
Description 2	for US 5 support
Material	Steel
Material symbol	St
Surface	Hot-dip galvanised
Surface to DIN	DIN EN ISO 1461
Surface symbol	FT
Smallest sales unit (VG)	1 Piece
Weight	61,90 kg/100 pc.

### Technical data

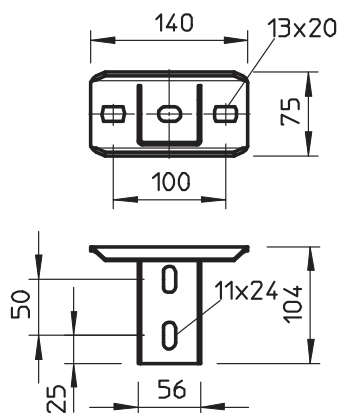

Version	Screw head plate
Suitable for ceiling fastening	<input checked="" type="checkbox"/>
Suitable for maintaining electrical function	<input checked="" type="checkbox"/>
Suitable for	U profile
Suitable for panel fastening	<input type="checkbox"/>
Rustproof steel, pickled	<input type="checkbox"/>
Angle range	90,00 - 90,00 °