


# Technical data sheet

## 90° bend with Z rung, 40

Item no. 7099068

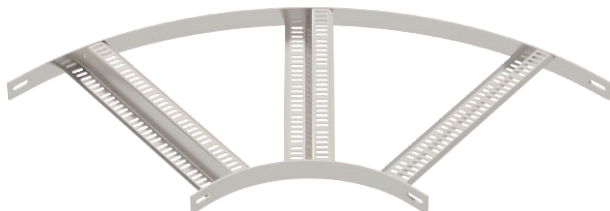

|    |                                   |
|----|-----------------------------------|
| VA | Stainless steel, rustproof 1.4571 |
| 2B | Bright, reworked                  |


90° bend for shipbuilding cable ladders, type SLZ, with side height of 40 mm with welded, perforated Z rungs.

Connectors should be ordered separately and in the appropriate quantity.

### Master data

|                          |                                      |
|--------------------------|--------------------------------------|
| Item no.                 | 7099068                              |
| Type                     | SLZB 90 500 A4                       |
| Description 1            | 90° bend                             |
| Description 2            | with Z-rung                          |
| Dimension                | B510mm                               |
| Material                 | Stainless steel, material no. 1.4571 |
| Material symbol          | A4                                   |
| Surface                  | Bright, reworked                     |
| Surface symbol           | 2B                                   |
| Smallest sales unit (VG) | 1 Piece                              |
| Weight                   | 524,30 kg/100 pc.                    |

### Technical data

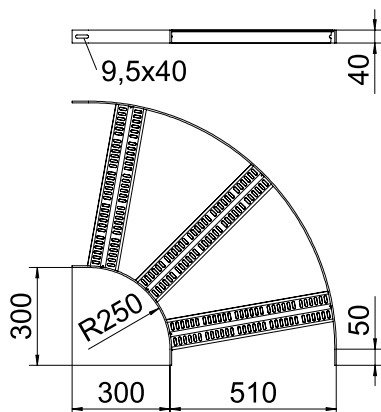

|                                              |                                     |
|----------------------------------------------|-------------------------------------|
| Width                                        | 500,00 mm                           |
| Side height                                  | 40,00 mm                            |
| Dimension R                                  | 250,00 mm                           |
| Bend (angle)                                 | 90°                                 |
| Connector version                            | Without connectors                  |
| Rung version                                 | Profile perforated                  |
| Side rail version                            | Flat profile                        |
| Suitable for maintaining electrical function | <input type="checkbox"/>            |
| Rail thickness                               | 5,00 mm                             |
| Change of direction                          | Horizontal                          |
| Rustproof steel, pickled                     | <input checked="" type="checkbox"/> |
| Hinged                                       | <input type="checkbox"/>            |
| Side perforation                             | <input type="checkbox"/>            |
| Wide-span version                            | <input type="checkbox"/>            |