


Technical data sheet

Cable ladder with Z rung, 40

Item no. 7098222

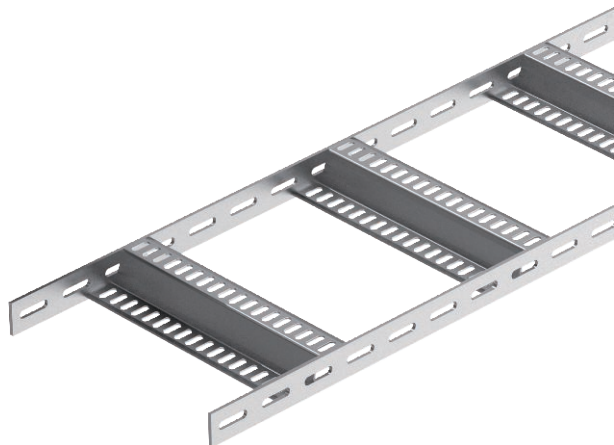

Shipbuilding cable ladder with perforated side rail of side height 40 mm with welded, perforated Z rungs. Load tested according to IEC in conjunction with connector, type SLV.

The shipbuilding cable ladder is also available in unpainted steel on request.




VA	Stainless steel, rustproof 1.4571
2B	Bright, reworked

Master data

Item no.	7098222
Type	SLZ 100 A4
Description 1	Cable ladder, shipbuilding
Description 2	with Z-rung
Dimension	40x110x3000
Material	Stainless steel, material no. 1.4571
Material symbol	A4
Surface	Bright, reworked
Surface symbol	2B
Smallest sales unit (VG)	3 m
Weight	319,00 kg/100 m

Technical data

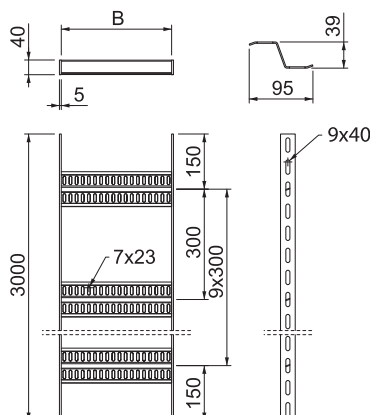

Length	3.000,00 mm
Width	100,00 mm
Side height	40,00 mm
Dimension B	110,00 mm
Dimension	40x100 mm
Rung version	Profile perforated
Side rail version	Flat profile
Fastening of rung	Welded
Suitable for maintaining electrical function	☐
Rail thickness	5,00 mm
Rustproof steel, pickled	☒
Side perforation	☒
Rung distance	300,00 mm
Wide-span version	☐
Impact energy	20,00 J

Appr. load:

Support spacing 1.5 m	2,80 kN/m
Support spacing 2.0 m	1,50 kN/m
Support spacing 2.5 m	0,80 kN/m
Support spacing 3.0 m	0,50 kN/m

Technical data