

# Technical data sheet

## Internal corner, for cable trunking type LKM 60200

Item no. 6249655



Internal corner for changing the direction of the LKM trunking.

Equipotential bonding without additional aids, between base and cover




**St** Steel

**FSK** Strip galvanised/powder-coated

### Master data

|                          |                                |
|--------------------------|--------------------------------|
| Item no.                 | 6249655                        |
| Type                     | LKM I60200RW                   |
| Description 1            | Internal corner                |
| Dimension                | 60x200mm                       |
| Colour                   | Pure white                     |
| RAL number               | 9010                           |
| Material                 | Steel                          |
| Material symbol          | St                             |
| Surface                  | Strip galvanised/powder-coated |
| Surface to DIN           | DIN EN 10346                   |
| Surface symbol           | FSK                            |
| Smallest sales unit (VG) | 1 Piece                        |
| Weight                   | 57,50 kg/100 pc.               |

### Technical data

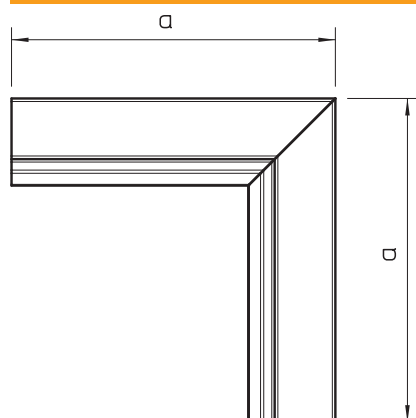

|                                              |                                     |
|----------------------------------------------|-------------------------------------|
| Length                                       | 160,00 mm                           |
| Width                                        | 200,00 mm                           |
| Height                                       | 64,00 mm                            |
| Dimension a                                  | 160,00 mm                           |
| Version for                                  | Base                                |
| Fastening type                               | Base perforation                    |
| for duct dimension                           | 60 x 200                            |
| Suitable for maintaining electrical function | <input type="checkbox"/>            |
| Halogen-free                                 | <input checked="" type="checkbox"/> |
| Trunking height                              | 64,00 mm                            |
| Trunking height                              | 64,00 mm                            |
| Protective film                              | <input type="checkbox"/>            |
| Angle range                                  | 90,00 °                             |