

# Technical data sheet

## Mounting lid UKL4

Item no. 7428538



Cavity floors are usually equipped with round flush-mount units. The installation openings required for this are created either using crown drills or using a screed protection cover. Beneath the screed plate, the cables are run freely to the service outlets and cassettes without cable routing systems.




|           |                  |
|-----------|------------------|
| <b>St</b> | Steel            |
| <b>FS</b> | Strip galvanised |

### Master data

|                          |                   |
|--------------------------|-------------------|
| Item no.                 | 7428538           |
| Type                     | DUG UKL4          |
| Description 1            | Mounting lid      |
| Description 2            | UKL4 in HB        |
| Dimension                | 370x230x26        |
| Material                 | Steel             |
| Material symbol          | St                |
| Surface                  | Strip galvanised  |
| Surface to DIN           | DIN EN 10346      |
| Surface symbol           | FS                |
| Smallest sales unit (VG) | 1 Piece           |
| Weight                   | 114,00 kg/100 pc. |

### Technical data

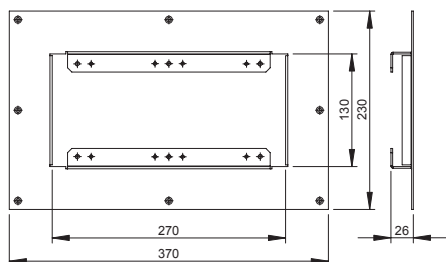

|        |           |
|--------|-----------|
| Length | 370,00 mm |
| Width  | 230,00 mm |