


Technical data sheet

GES4 service outlet with handle clamp

Item no. 7405204

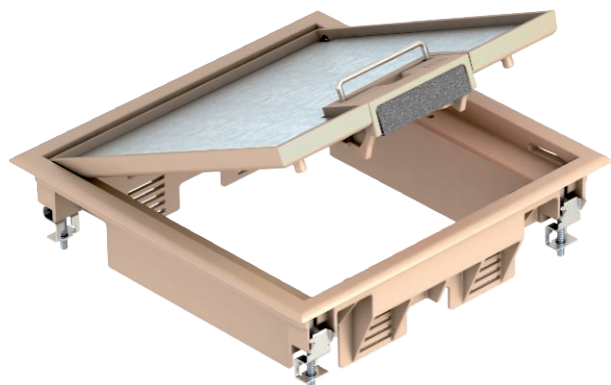

PA Polyamide

Service outlet with handle clamp for up to 6 individual Modul 45 devices in 2 UT3 universal supports, use in duct systems and system floors for indoor use.


Up to 4 installation devices with 50 mm central plate can be inserted.

Service outlet with handle clamp, 2-compartment, for the installation of MT4 mounting support. Two type APMT2 cover plates can be installed.

Master data

Item no.	7405204
Type	GES4 U 1019
Description 1	Service outlet
Description 2	for duct mounting
Dimension	217x217x61
Colour	Grey-beige
RAL number	1019
Material	Polyamide
Material symbol	PA
Smallest sales unit (VG)	1 Piece
Weight	139,50 kg/100 pc.

Technical data

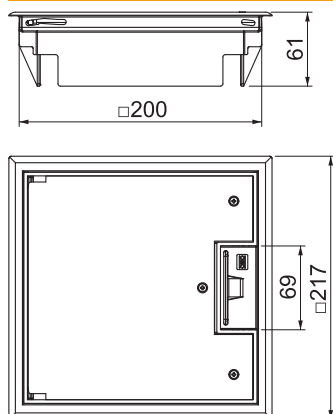

Dimension h	73,00 mm
Wide external dimensions	217,00 mm
Wide installation dimensions	200,00 mm
Length of external dimensions	217,00 mm
Length of installation dimensions	200,00 mm
Number of installable devices	6
Number of mounting boxes	2
Cable outlet version	Swivellable cord outlet
Floor covering thickness	5,00 mm
Floor covering protection frame	☒
Floor care	Dry
Version for	Square
Seal installation option	☐
Installation depth	73,00 mm
Floor height	72 mm
Device support to accept mounting boxes	☒
Suitable for wet care	☐
Suitable for screed-flush closed underfloor ducts	☐
Suitable for screed-covered underfloor ducts	☒
Suitable for raised floor installation	☒
Suitable for cavity floor installation	☒
Suitable for underfloor ducts	☒
With floor covering recess	☒

Technical data sheet

GES4 service outlet with handle clamp

Item no. 7405204



Technical data

Nominal size for device installation units	4
Suitable for underfloor box	250/350
Opening mechanism	Handle
Frame version	Carpet protection frame
Schwerlastausführung	☐
Approvals	