


Technical data sheet

GESR9 service outlet with locking slider

Item no. 7405467

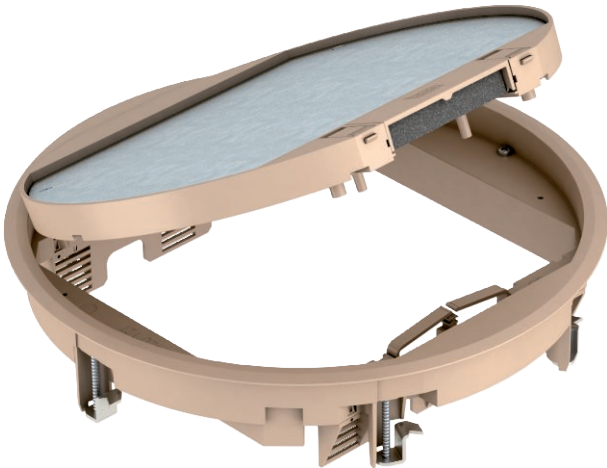

Service outlet with locking slider for up to 12 individual Modul 45 devices in 3 UT4 universal supports, use in duct and trunking systems and system floors.
5 mm floor covering recess in the hinged cover, if necessary, adjustable to 3, 10 or 12 mm.



PA

Polyamide

Additional product text, instruction	Up to 9 installation devices with 50 mm central plate can be inserted.
Additional product text 1	

Master data

Item no.	7405467
Type	GESR9-2U12T 1019
Description 1	Service outlet
Description 2	for universal mounting
Dimension	324x324x68
Colour	Grey-beige
RAL number	1019
Material	Polyamide
Material symbol	PA
Smallest sales unit (VG)	1,00 Piece
Weight	244,00 kg/100 pc.


Technical data sheet

GESR9 service outlet with locking slider

Item no. 7405467



Technical data

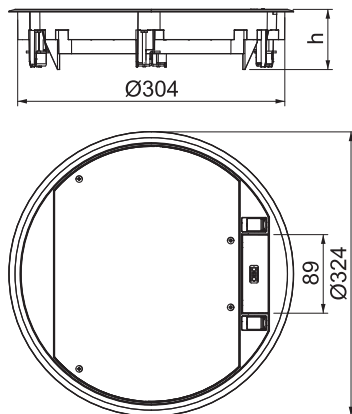

External diameter	324,00 mm
Installation diameter	304,00
Number of installable devices	12,00
Number of mounting boxes	3,00
Floor covering thickness	12,00 mm
Floor covering protection frame	☒
Floor care	Dry
Version for	Round
Seal installation option	☐
Installation depth	73,00 mm
Floor height	72 mm
Device support to accept mounting boxes	☒
Suitable for wet care	☐
Suitable for screed-flush closed underfloor ducts	☒
Suitable for screed-covered underfloor ducts	☒
Suitable for raised floor installation	☒
Suitable for cavity floor installation	☒
Suitable for underfloor ducts	☒
With floor covering recess	☒
Nominal size for device installation units	R9
Suitable for underfloor box	350
Opening mechanism	Locking slider
Frame version	Carpet protection frame
Schwerlastausführung	☐
Typ des Einbausystems	UT4
Approvals	VDE