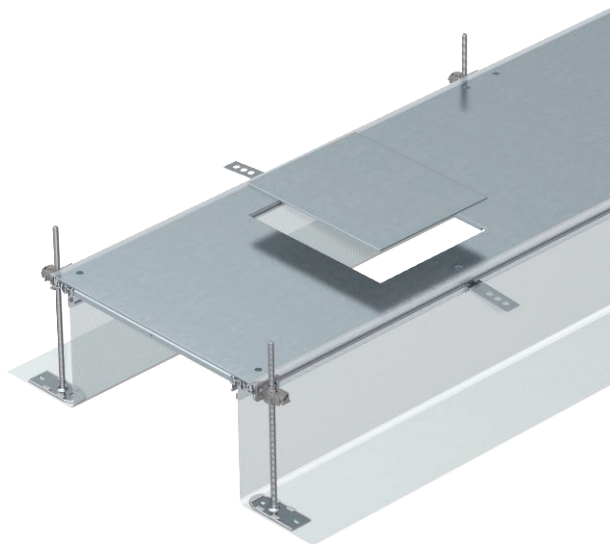# Technical data sheet
Trunking unit for GES6, height 40–240 mm

Item no. 7424182

Ready-to-mount trunking unit for cable routing with 3 or 6 device installation lids for the installation of a flush-mount unit of nominal size 6, consisting of two side profiles with attached flexible side wall made of metal mesh, floor covering contact profiles 4 mm. The scope of delivery contains 6 height-adjustable fixing brackets, 6 screed anchors and 3 lid butt supports for nominal trunking width 400 and 6 lid butt supports for nominal trunking widths 500 and 600. The essential levelling units (please observe height adjustment) for the 400, 500 and 600 lid support are not contained in the scope of delivery and should be ordered separately. The trunking lids are screwed up to and including the nominal width 400.

With screw-on device installation lids, each with an installation opening for an installation unit nominal size 6.
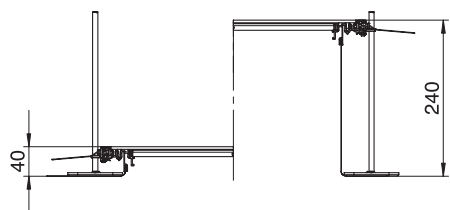
St	Steel
FS	Strip galvanised

Master data

Item no.	7424182
Type	OKA-G40040240D6
Description 1	Flushfloor trunking unit
Description 2	for service unit GES6
Dimension	2400x400x240
Material	Steel
Material symbol	St
Surface	Strip galvanised
Surface to DIN	DIN EN 10346
Surface symbol	FS
Smallest sales unit (VG)	2 m
Weight	1.453,75 kg/100 m

Technical data

Length	2.400,00 mm
Width	400,00 mm
Covers	3,00 pc.
Mounting opening cover	☑
Number of planned flush-mount units	3
Floor plate	☐
Seal installation option	☑
Cover fastening, locking	☐
Installation opening for on-floor tank	☐
Decouplable	☑
Suitable for expansion joint	☐
Mesh wall	☑
Trunking height	40,00 - 240,00 mm
Cover material thickness	4,00 mm
Minimum screed height	40
With overhang	☑
With separating retainer	☐
With connection opening	☑

Technical data

With equipotential bonding	☐
Mounting opening	For service outlet
Mounting opening	Rectangular
Height-adjustment range	40,00 - 240,00 mm
Removable cover	☑