


Technical data sheet

Trunking unit, blank, locking, height 40–240 mm

Item no. 7424064

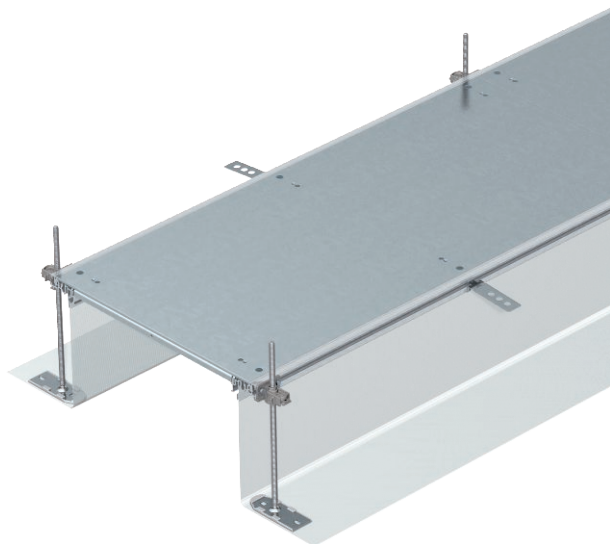

Ready-to-mount trunking unit for cable routing, consisting of 3 self-locking blanking lids, two side profiles with attached flexible side wall made of metal mesh, floor covering contact profiles of 3 mm height. The scope of supply contains six height-adjustable wall fixing brackets, six screed anchors and three cover joint supports (for nominal trunking widths 200 and 300) or three cover joint supports for nominal trunking width 400 and six height-adjustable cover joint supports for nominal trunking widths 500 and 600. The essential levelling units (observe height adjustment) for the 400, 500 and 600 lid supports are not contained in the scope of delivery and should be ordered separately. On delivery, the duct lids are screwed on and the locking springs are pre-mounted.



St Steel

FS Strip galvanised

Master data

Item no.	7424064
Type	OKA-G40040240R
Description 1	Flush floor trunking unit
Description 2	blank, locking
Dimension	2400x400x240
Material	Steel
Material symbol	St
Surface	Strip galvanised
Surface to DIN	DIN EN 10346
Surface symbol	FS
Smallest sales unit (VG)	2 m
Weight	1.503,80 kg/100 m

Technical data

	Length	2.400,00 mm
	Width	400,00 mm
	Covers	3,00 pc.
	Mounting opening cover	☐
	Floor plate	☐
	Floor care	Wet
	Seal installation option	☒
	Cover fastening, locking	☒
	Installation opening for on-floor tank	☐
	Decouplable	☒
	Suitable for expansion joint	☐
	Mesh wall	☒
	Trunking height	40,00 - 240,00 mm
	Cover material thickness	4,00 mm
	Minimum screed height	40
	With overhang	☒
	With separating retainer	☐
	With connection opening	☐
	With equipotential bonding	☐

Technical data sheet

Trunking unit, blank, locking, height 40–240 mm

Item no. 7424064



Technical data

Mounting opening	Without
Mounting opening	Without
Height-adjustment range	40,00 - 240,00 mm
Removable cover	☒